































Table of Contents

Platinum Series	4
Platinum NVRs	6
Platinum IP Cameras	9
Platinum Specialty IP Cameras	23
Platinum DVRs	28
Platinum HD-TVI Cameras	32
Pro-VS Series	40
Pro-VS NVRs	41
Pro-VS IP Cameras	44
Pro-VS Specialty IP Cameras	46
Intercom and Access Control	48
Accessories	52
Storage	58

Icon Glossary

 NDA A-Compliant	 Human / Vehicle Detection
 Color Footage 24/7	 Hybrid Illumination
 MicroSD Supported	 True WDR-Enabled
 H.265+ Compression	 H.265 Compression
 Active Deterrence	 Panoramic Lens
 Two-Way Audio	 Built-in Microphone
 Auto Focus Lens	 Solar-Powered Device
 Fisheye Lens	 IP & Analog Compatible
 Wi-Fi	 Vandal Resistant
 RAID Supported	 HDMI Output
 Fire Prevention	 Industrial Temperature Monitoring
 Thermal / Optical VCA	 Smart Tracking with Human / Vehicle Classification
 8K Video Resolution	 4K Video Resolution
 5 Video Formats Supported	 4 Video Formats Supported
 Direct Search	 InstaDome

LTS Platinum Partner

Cloud-based Video Security Solution




Mobile and web-based
IP portal and
configuration tool







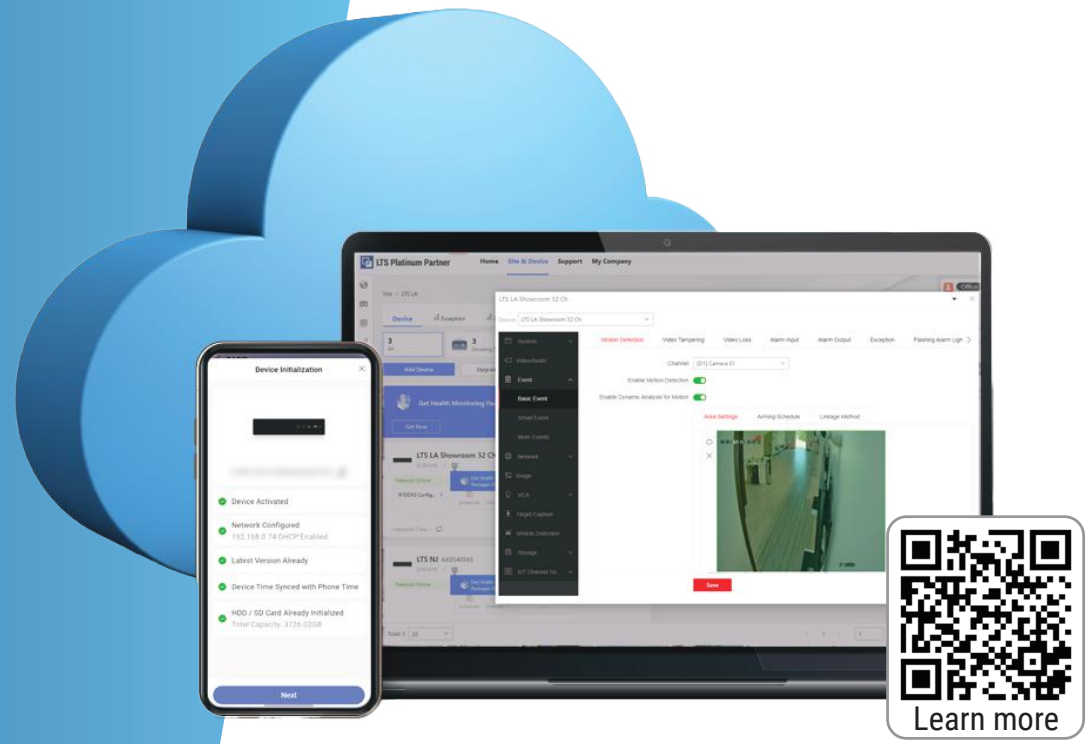





















PC software not required

Batch activation,
configuration, and
maintenance of cameras
via PT Cloud

























No more port forwarding
































Professional Level NVR

SKU	LTN8704QN-P4	LTN8708QN-P8	LTN8708D-P8N	LTN8608-P8N	LTN8716D-P16N	LTN8616-P16N	LTN8608D-P8N	LTN8616D-P16N
								
Price	\$187	\$305	\$364	\$458	\$505	\$575	\$548	\$575
Featuring			 		 		 	 
Video Input	4 Ch IP @ 40 Mbps	8 Ch IP @ 80 Mbps	8 Ch IP @ 80 Mbps	8 Ch IP @ 128 Mbps	16 Ch IP @ 160 Mbps	16 Ch IP @ 256 Mbps	8 Ch IP @ 80 Mbps	16 Ch IP @ 160 Mbps
Video Output	HDMI up to 4K (3840 x 2160) / VGA up to 1080p	HDMI up to 4K (3840 x 2160) / VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI up to 8K (7680 x 4320), VGA up to 1080p, CVBS up to 704 x 480	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI up to 8K (7680 x 4320), VGA up to 1080p, CVBS up to 704 x 480	HDMI up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480	HDMI up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480
Max. Recording Resolution	Up to 4K, 8 MP (3840 x 2160)	Up to 4K, 8 MP (3840 x 2160)	Up to 12 MP	Up to 32 MP	Up to 12 MP	Up to 32 MP	Up to 32 MP	Up to 32 MP
Decoding Format	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Decoding Capability	1 Ch @ 8 MP / 2 Ch @ 4 MP	1 Ch @ 8 MP / 2 Ch @ 4 MP	VCA by NVR on: 4 Ch @ 4 MP VCA by NVR off: 6 Ch @ 4 MP	8 Ch @ 8 MP	VCA by NVR on: 4 Ch @ 4 MP VCA by NVR off: 6 Ch @ 4 MP	8 Ch @ 8 MP 16 Ch @ 4 MP	VCA by NVR on: 20 Ch @ 1080p VCA by NVR off: 30 Ch @ 1080p	VCA by NVR on: 20 Ch @ 1080p VCA by NVR off: 30 Ch @ 1080p
Audio Channels (In / Out)	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA
Alarm Channels (In / Out)	-	-	4 / 1	4 / 1	4 / 1	4 / 1	4 / 1	4 / 1
Built-in PoE	4 Ch	8 Ch	8 Ch	8 Ch	16 Ch	16 Ch	8 Ch	16 Ch
Bandwidth, Connector	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45
Storage	1 x SATA up to 8 TB, NAS, IP SAN	2 x SATA up to 8 TB, NAS, IP SAN	2 x SATA up to 10 TB each, NAS, IP SAN	2 x SATA up to 14 TB each, NAS, IP SAN	2 x SATA up to 10 TB each, NAS, IP SAN	2 x SATA up to 14 TB each, NAS, IP SAN	2 x SATA up to 14 TB each, NAS, IP SAN	2 x SATA up to 14 TB each, NAS, IP SAN
POSSs Supported	-	-	-	4 (TCP)	-	4 (TCP)	4 (TCP)	4 (TCP)
Backup	2 x USB 2.0	2 x USB 2.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0
Dimensions (W x D x H)	12.4" x 9.4" x 1.9"	15.2" x 12.4" x 2.0"	15.2" x 12.4" x 2.0"	15.2" x 12.4" x 2.0"	15.2" x 12.4" x 2.0"	15.2" x 12.4" x 2.0"	15.2" x 12.5" x 2.0"	15.2" x 12.5" x 2.0"
Product QR Code								





























Enterprise Level NVR

SKU	LTN8916-N LTN8916-P16N	LTN8916D-N LTN8916D-P16N	LTN8932-N LTN8932-P16N	LTN8932D-N LTN8932D-P16N	LTN8964-RN	LTN07128-R16	LTN07128-R16N	LTN07256-R16
								
Price	\$575 / \$764	\$575/ \$764	\$764 / \$928	\$764 / \$928	\$1864	\$4352	\$4352	\$6787
Featuring								
Video Input	16 Ch IP @ 256 Mbps	16 Ch IP @ 160 Mbps	32 Ch IP @ 320 Mbps	32 Ch IP @ 256 Mbps	64 Ch IP @ 400 Mbps	128 Ch IP @ 576 Mbps	128 Ch IP @ 400 Mbps	256 Ch IP @ 768 Mbps
Video Output	HDMI1 up to 8K (7680 x 4320), HDMI2 up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480	HDMI1 up to 4K (3840 x 2160), HDMI2 up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480	HDMI1 up to 8K (7680 x 4320), HDMI2 up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480	HDMI1 up to 4K (3840 x 2160), HDMI2 up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480	HDMI1 up to 8K (7680 x 4320) / VGA1 up to 1080p, HDMI2 up to 4K (3840 x 2160) / VGA2 up to 1080p, CVBS up to 704 x 480	HDMI1 up to 4K / VGA up to 1080p, HDMI2 up to 4K (4096 x 2160)	HDMI1 up to 8K / VGA up to 1080p, HDMI2 up to 4K (3840 x 2160)	HDMI1 up to 4K / VGA up to 1080p, HDMI2 up to 4K, 6 HDMI TV Wall Built-in 7" Touch Screen
Max. Recording Resolution	Up to 32 MP	Up to 32 MP	Up to 32 MP	Up to 32 MP	Up to 32 MP	Up to 12 MP	Up to 32 MP	Up to 12 MP
Decoding Format	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Decoding Capability	8 Ch @ 8 MP / 16 Ch @ 4 MP	VCA by NVR on: 20 Ch @ 1080p VCA by NVR off: 30 Ch @ 1080p	8 Ch @ 8 MP / 16 Ch @ 4 MP	VCA by NVR on: 20 Ch @ 1080p VCA by NVR off: 30 Ch @ 1080p	8 Ch @ 8 MP / 16 Ch @ 4 MP	5 Ch @ 8 MP / 10 Ch @ 4 MP	8 Ch @ 8 MP / 16 Ch @ 4 MP	5 Ch @ 8 MP / 10 Ch @ 4 MP
Audio Channels (In / Out)	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA	1 / 2, RCA	1 / 1, RCA	1 / 2, RCA	1 / 1, RCA
Alarm Channels (In / Out)	16 / 9	16 / 9	16 / 9	16 / 9	16 / 9	48 / 24	16 / 9	48 / 24
Built-in PoE	- / 16 Ch	- / 16Ch	- / 16 Ch	- / 16 Ch	-	-	-	-
Bandwidth, Connector	10/100/1000 Mbps, 2 x RJ45 (1 x RJ45)	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 2 x RJ45 (1 x RJ45)	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 2 x RJ45	1000 Mbps, 4 x RJ45, 4 Fiber Optic	10/100/1000 Mbps, 2 x RJ45	1000 Mbps, 4 x RJ45, 4 Fiber Optic
Storage	4 x SATA up to 14 TB each, eSATA, NAS, IP SAN	4 x SATA up to 10 TB each, eSATA, NAS, IP SAN	4 x SATA up to 14 TB each, eSATA, NAS, IP SAN	4 x SATA up to 10 TB each, eSATA, NAS, IP SAN	8 x SATA up to 14 TB each, eSATA, NAS, IP SAN, RAID 0 / 1 / 5 / 6 / 10	16 x SATA up to 10 TB each, NAS, IP SAN, RAID 0 / 1 / 5 / 6 / 10	16 x SATA up to 16 TB each, NAS, IP SAN, RAID 0 / 1 / 5 / 6 / 10	16 x SATA up to 10 TB each, NAS, IP SAN, RAID 0 / 1 / 5 / 6 / 10
POSSs Supported	8 (TCP or RS232)	8 (TCP or RS232)	8 (TCP or RS232)	8 (TCP or RS232)	8 (TCP or RS232)	16 (TCP)	16 (TCP)	16 (TCP)
Hot Swap HDD	-	-	-	-	Yes	Yes	Yes	Yes
Backup	2 x USB 2.0, 1 x USB 3.0, eSATA	2 x USB 2.0, 1 x USB 3.0, eSATA	2 x USB 2.0, 1 x USB 3.0, eSATA	2 x USB 2.0, 1 x USB 3.0, eSATA	2 x USB 2.0, 2 x USB 3.0, eSATA	2 x USB 2.0, 2 x USB 3.0	2 x USB 2.0, 2 x USB 3.0, eSATA	2 x USB 2.0, 2 x USB 3.0
Dimensions (W x D x H)	17.5" x 15.7" x 3.0"	17.3" x 15.4" x 3.0"	17.5" x 15.7" x 3.0"	17.3" x 15.4" x 3.0"	17.5" x 18.3" x 3.6"	17.5" x 19.4" x 5.7"	17.5" x 19.5" x 5.9"	17.5" x 19.4" x 5.7"
Product QR Code								































Color 24/7 IP Turret Camera														
SKU	CMIP3C42WI-28MDA CMIP3C42WI-MDA		CMIP3C42NWB-28MDA		CMIP3C42W-28SDL		CMIP3C42WI-28SDL		CMIP3C82WI-28MDA					
							 NEW							
Price	\$199		\$187		\$210		\$210		\$269					
Featuring														
Max. Resolution	4 MP, Hybrid Illumination Color 24/7 IP Camera 2688 x 1520 @ 30 fps		4 MP, Color 24/7 Fixed Turret Network Camera 2688 x 1520 @ 30 fps		4 MP, Color 24/7 IP Camera 2688 x 1520 @ 30 fps		4 MP, Active Deterrence Color 24/7 IP Camera 2688 x 1520 @ 30 fps		8 MP, Hybrid Illumination Color 24/7 IP Camera 3840 x 2160 @ 24 fps					
Lens	2.8 / 4 mm, Fixed		2.8 mm, Fixed (4 mm optional)		2.8 mm, Fixed		2.8 mm, Fixed		2.8 mm, Fixed					
Min. Illumination	0.0005 Lux @ F1.0, AGC On, 0 Lux with suppl. light		Color: 0.0005 Lux @ F1.0, AGC on B&W: 0 Lux with suppl. light		0.0005 Lux @ F1.0, 0 Lux with suppl. light		0.0005 Lux @ F1.0, AGC on, 0 Lux with suppl. light		0.0008 Lux @ F1.0, AGC On, 0 Lux with suppl. light					
Compression	H.265+ / H.265		H.264 / H.264+ / H.265 / H.265+		H.265+ / H.265 / H.264+ / H.264		H.265+/H.265/H.264+/H.264		H.265+ / H.265					
Image Sensor	1/3" Progressive Scan CMOS		1/3" Progressive Scan CMOS		1/1.8" Progressive Scan CMOS		1/3" Progressive Scan CMOS		1/1.8" Progressive Scan CMOS					
Special Features	IR + White Light, MD 2.0, True WDR 120 dB		130 dB WDR, MD 2.0 Human & Vehicle Classification, Face Capture, 2-Way Comm		MD 2.0, True WDR 130 dB, Active Deterrence with Strobe Light		MD 2.0, True WDR 130 dB, Active Deterrence with Red & Blue Strobe Light		IR + White Light, MD 2.0, True WDR 130 dB					
Audio In / Out	Built-in Mic		1 / 1		Built-in Mic & Speaker		Built-in Mic & Speaker		Built-in Mic					
Alarm In / Out	-		1 / 1		1 / 1		1 / 1		-					
MicroSD Storage	Up to 512 GB		Up to 256 GB		Up to 256 GB		Up to 512 GB		Up to 512 GB					
Protection	IP67		IP67		IP67		IP67		IP67					
Power	12V DC, PoE		12V DC, PoE		12V DC, PoE		12V DC, PoE		12V DC, PoE					
Product QR Code	 													
Compatible Accessories	Compatible with CMIP3C42WI						Compatible with CMIP3C42NWB-28MDA / 3C42W-28SDL / 3C42WI-28SDL / 3C82WI-28MDA							
														
	\$14	\$20	\$34	\$52	\$29	\$29	\$20	\$34	\$19	\$53	\$53	\$29	\$29	





















Color 24/7 IP Turret Camera

Panoramic IP Camera




























SKU	CMIP3C82W-28MDAL	CMIP3C82WI-28SDL	CMIP384PW-28SDL	CMIP3C6PW-28SDL	CMIP3C8PW-SDL								
													
Price	\$281	\$281	\$170	\$281	\$328								
Featuring													
Max. Resolution	8 MP, Color 24/7 IP Camera 3840 x 2160 @ 24 fps	8 MP, Active Deterrence Color 24/7 IP Camera 3840 x 2160 @ 24 fps	4MP, Panoramic IP Camera 3040 x 1368 @ 24 fps	6 MP, Color 24/7 IP Camera 3632 x 1632 @ 20 fps	8 MP, Color 24/7 IP Camera 5120 x 1440 @ 20 fps or 15 fps with WDR								
Lens	2.8 mm, Fixed	2.8 mm, Fixed	180° Horizontal, 81° Vertical	180° Horizontal, 81° Vertical	180° Horizontal, 44° Vertical								
Min. Illumination	0.0005 Lux @ F1.0, AGC On, 0 Lux with suppl. light	0.0008 Lux @ F1.0, AGC on, 0 Lux with suppl. light	0.003 Lux @ F1.6, AGC on, 0 Lux IR	0.0005 Lux @ F1.0, 0 Lux with suppl. light	0.0005 Lux @ F1.0, 0 Lux with LED Light on								
Compression	H.265+ / H.265	H.264 / H.264+ / H.265 / H.265+	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264								
Image Sensor	1/1.2" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	2 x 1/2.5" Progressive Scan CMOS	2 x 1/2.5" Progressive Scan CMOS	2 x 1/1.8" Progressive Scan CMOS								
Special Features	MD 2.0, True WDR 130 dB, Active Deterrence with Strobe Light	MD 2.0, True WDR 130 dB, Active De- terrence with Red & Blue Strobe Light	MD 2.0, True WDR 120 dB, Active Deter- rence with Strobe Light	MD 2.0, True WDR 130 dB, Active Deterrence with Strobe Light	MD 2.0, True WDR 130 dB, Active Deter- rence with Strobe Light								
Audio In / Out	Built-in Mic & Speaker, 1 / 1	Built-in Mic & Speaker	Built-in Mic & Speaker	Built-in Mic & Speaker	Built-in Mic & Speaker								
Alarm In / Out	1 / 1	1 / 1	1 / 1	1 / 1	1 / 1								
MicroSD Storage	Up to 512 GB	Up to 512 GB	Up to 512 GB	Up to 256 GB	Up to 256 GB								
Protection	IP67	IP67	IP67	IP67	IP67								
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE Max 12.5W	12V DC, PoE Max 12.5W								
Product QR Code													
Compatible Accessories	Compatible with CMIP3C82W-28MDAL / CMIP3C82WI-28SDL					Compatible with CMIP384PW-28SDL / CMIP3C6PW-28SDL					Compatible with CMIP3C8PW		
	 LTB701 Junction Box for CMIP- 3C82W-28MDAL / 3C82WI-28SDL	 LTB342-140 LTB342-140(B) Wall Mount	 LTB341 Pendant Mount 22" (56cm)	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount for CHIP384PW-28SDL	 LTB379 Corner Mount for CHIP384PW-28SDL	 LTB701 Junction Box	 LTB342-140 Wall Mount	 LTB341 Pendant Mount	 LTB342-155 Wall Mount	 LTB781 Pendant Mount	 LTB722 Junction Box
	\$20	\$34	\$53	\$29	\$29	\$29	\$29	\$20	\$34	\$53	\$34	\$53	\$20

Panoramic IP Camera	Color 24/7 IP Dome Camera				
---------------------	---------------------------	--	--	--	--






























SKU	CMIP9C8PW-SDL	CMIP7C42WI-28MDA	CMIP7C82W-28MDA	CMIP7C82WI-28MDA	CMIP7C43W-SDZ	CMIP7C43WI-SDLQ								
														
Price	\$352	\$199	\$258	\$269	\$352	\$352								
Featuring														
Max. Resolution	8 MP, Panoramic Bullet IP Camera 5120 x 1440 @ 20 fps	4 MP, Hybrid Illumination Color 24/7 IP Camera 2688 x 1520 @ 30 fps	8 MP, Color 24/7 IP Camera 3840 x 2160 @ 24 fps	8 MP, Hybrid Illumination Color 24/7 IP Camera 3840 x 2160 @ 24 fps	4 MP, Color 24/7 IP Camera 2688 x 1520 @ 30 fps	4 MP, 2688 x 1520 @ 30 fps								
Lens	180° Horizontal, 44° Vertical	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 - 12 mm, Motorized	2.8 - 12 mm, VF, Motorized								
Min. Illumination	0.0005 Lux @ F1.0, AGC on, 0 Lux with suppl. light	0.0005 Lux @ F1.0, AGC On, 0 Lux with Light on	0.0008 Lux @ F1.0, AGC On, 0 Lux with White Light	0.0005 Lux @ F1.0, AGC On, 0 Lux with Light on	0.0005 Lux @ F1.0, AGC On, 0 Lux with White Light	0.0028 Lux @ F1.2, AGC on; 0 Lux with Light on								
Compression	H.265 / H.265+	H.265+ / H.265	H.265+ / H.265	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265	H.265+ / H.265 / H.264+ / H.264								
Image Sensor	2 x 1/1.8" Progressive Scan CMOS	1/3" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	MD 2.0, True WDR 120 dB, Active Deterrence with Red & Blue Strobe Light, IR, white light up to 130 ft								
Special Features	MD 2.0, True WDR 130 dB, Active Deterrence with Strobe Light	IR + White Light, MD 2.0, True WDR 120 dB	MD 2.0, True WDR 130 dB	IR + White Light, MD 2.0, True WDR 130 dB	MD 2.0, True WDR 130 dB									
Audio In / Out	Built-in Mic & Speaker	Built-in Mic	Built-in Mic	Built-in Mic	1 / 1	2 Built-in Mics / 1 Built-in Speaker								
Alarm In / Out	1 / 1	-	-	1 / 1	1 / 1	1 / 1								
MicroSD Storage	Up to 512 GB	Up to 512 GB	Up to 512 GB	Up to 512 GB	Up to 512 GB	Up to 512 GB								
Protection	IP67	IP67, IK10	IP67, IK10	IP67	IP67, IK10	IP66, IK10								
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE								
Product QR Code														
Compatible Accessories	Compatible with CMIP9C8PW-SDL			Compatible with CMIP7C42WI / CMIP7C82W / CMIP7C82WI					Compatible with CMIP7C43W-SDZ / 7C43WI-SDLQ					
														
	\$20	\$29	\$29	\$20	\$25	\$49	\$53	\$29	\$34	\$34	\$19	\$52	\$46	\$46

Color 24/7 IP Bullet Camera		Solar IP Camera			IP Speaker		
SKU	CMIP8C42WI-28MDA	CMIP9C42WI-28MD	CMIP9C82W-28SD-B4G	LTA-SLP80-B36	LTA-NHS120-P		
							
Price	\$199	\$211	\$1,881	Coming Soon		Coming Soon	
Featuring				Description	Solar Powered Kit	Featuring	
				Power Input	80W photovoltaic panel	Max. Acoustic Pressure	121 dB SPL
Max. Resolution	4 MP, Hybrid Illumination Color 24/7 IP Camera 2688 x 1520 @ 30 fps	4 MP, Hybrid Illumination Color 24/7 IP Camera 2688 x 1520 @ 30 fps	8 MP, Color 24/7 IP Camera 3840 x 2160 @ 15 fps	Battery Capacity	360 Wh	Speaker Sensitivity	110 dB (1 m 1 W)
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	Dimensions	25 x 29 x 30" (assembled)	Frequency Response	300 Hz to 13 kHz
Min. Illumination	0.0005 Lux @ F1.0, AGC On, 0 Lux with Suppl. light	0.0005 Lux @ F1.0, AGC On, 0 Lux with Suppl. light	0.0005 Lux @ F1.0, 0 Lux with LED Suppl. light			Microphones	2 x Electret, 100 Hz to 20 kHz
Compression	H.265+ / H.265	H.265+ / H.265	H.265 / MJPEG	Protection	IP66 (-4° to 113° F)	Audio Compression	G.711ulaw (64 Kbps) / G.711alaw (64 Kbps) / MP3 (128 Kbps)
Image Sensor	1/3" Progressive Scan CMOS	1/3" Progressive Scan CMOS	1/1.2" Progressive Scan CMOS	Power Output	9 to 12.6V DC, max. 30 W, 2 x Ø 5.5 mm coaxial power plugs	Audio File Format	WAV, MP3, MP2, AAC
Special Features	IR + White Light, MD 2.0, True WDR 120 dB	IR + White Light, MD 2.0, True WDR 120 dB	MD 2.0, T-Mobile Network, True WDR 130 dB			Alarm Channels (I/O)	1 / 1
Audio In / Out	Built-in Mic	-	1 / 1	Weight	67 lb.	Ethernet	0/100 Mbps, 1 x RI45
Alarm In / Out	-	-	1 / 1			Storage	64 GB EMMC
MicroSD Storage	Up to 512 GB	Up to 512 GB	Built-in 64 GB, Up to 256 GB	Protection Ratings		IP67	
Power	12V DC, PoE	12V DC, PoE	12V DC, 1A, 80W Solar Panel, 360Wh Battery Included	Power		12V DC, PoE power passthrough, < 10 W	
Product QR Code							
Compatible Accessories	Compatible with CMIP8C42WI-28MDA		Compatible with CMIP9C42WI-28MD		LTS Wireless Bridges		
							
	\$20	\$20	\$29	\$29	\$128	Coming Soon	




































Turret IP Camera

SKU	CMIP3342W-28MDA CMIP3342WB-28MDA CMIP3342W-MDA	CMIP3382W-28MDA CMIP3382WB-28MDA CMIP3382W-MDA	CMIP3283W-SDZ	CMIP3D82W-28SDA-SL							
			 Junction Box Included								
Price	\$152	\$199	\$340	\$222							
Featuring											
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	8 MP, 3840 x 2160 @ 20 fps	8 MP, 3840 x 2160 @ 20 fps	8 MP, 3840 x 2160 @ 24 fps							
Lens	2.8 / 4 mm, Fixed	2.8 / 4 mm, Fixed	2.8 - 12 mm, Motorized	2.8 mm, Fixed							
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.003 Lux @ F1.6							
Smart Focus	-	-	Yes	-							
Compression	H.265+ / H.265	H.265+ / H.265	H.265+ / H.265	H.265+ / H.265 / H.264+ / H.264							
Supplemental Lighting	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR LED up to 130 ft	Matrix IR LED up to 100 ft							
Special Features	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB, Active Deterrence with Strobe Light							
Audio In / Out	Built-in Mic	Built-in Mic	1 / 1	Built-in Mic & Speaker, 1 / 1							
Alarm In / Out	-	-	1 / 1	1 / 1							
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 256 GB	Up to 512 GB							
Protection	IP67	IP67	IP67, IK10	IP67							
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE							
Product QR Code	 2.8 mm Lens, White	 2.8 mm Lens, Black	 4 mm Lens	 2.8 mm Lens, White							
	 2.8 mm Lens, Black	 4 mm Lens	 2.8 mm Lens, White	 2.8 mm Lens, Black							
Compatible Accessories	Compatible with Designated Cameras Above						Compatible with Designated Cameras Above				
											
	LTB03-W Junction Box (White) for CMIP33XX	LTB03-B Junction Box (Black) for CMIP33XX	LTB301 Wall Mount	LTB342-JBOX Junction Box for Wall Mount	LTB331 Pendant Mount for CMIP33XX	LTB371 Pendant Mount 21.5" (55cm)	LTB378 Pole Mount	LTB379 Corner Mount	LTB701 Junction Box	LTB342-140 Wall Mount	LTB341 Pendant Mount 22" (56cm)
\$14	\$14	\$34	\$19	\$52	\$46	\$29	\$29	\$20	\$34	\$53	
















Mini Dome Fixed Lens IP Camera

SKU	CMIP3142W-28SDA	CMIP3142W-28SDA-WIFI	CMIP3162W-28SDA			
						
Price	\$187	\$187	\$211			
Featuring	      	       	      			
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	4 MP, 2688 x 1520 @ 30 fps	6 MP, 3200 x 1800 @ 20 fps			
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed			
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.005 Lux @ F1.6			
Compression	H.265+ / H.265	H.265+ / H.265	H.265+ / H.265			
Supplemental Lighting	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft			
Special Features	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB			
Audio In / Out	Built-in Mic & Audio Out	Built-in Mic & Audio Out	Built-in Mic & Audio Out			
Alarm In / Out	1 / 1	1 / 1	1 / 1			
Built-in Wi-Fi	-	2.4 GHz, 802.11g/n	-			
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 256 GB			
Range of Motion	3-Axis	3-Axis	3-Axis			
Protection	IP67, IK8	IP67, IK8	IP67, IK8			
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE			
Product QR Code						
Compatible Accessories	Compatible with Cameras Above					
	 LTB347H Junction Box	 LTB742-120 Wall Mount	 LTB742-120B Wall Mount with Junction Box	 LTB731 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount
	\$20	\$34	\$49	\$53	\$29	\$29

Dome Fixed Lens IP Camera

SKU	CMIP7342W-28MDA CMIP7342WB-28MDA CMIP7342W-MDA	CMIP7382W-28MDA CMIP7382WB-28MDA CMIP7382W-MDA	CMIP7382W-28SH				
							
Price	\$152	\$199	\$300				
Featuring	     	      	     				
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	8 MP, 3840 x 2160 @ 20 fps	8 MP, 3840 x 2160 @ 20 fps				
Lens	2.8 / 4 mm, Fixed	2.8 / 4 mm, Fixed	2.8 mm, Fixed				
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.028 Lux @ F2.0				
Compression	H.265+ / H.265	H.265+ / H.265	H.265+ / H.265				
Supplemental Lighting	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft				
Special Features	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	True WDR 120 dB, 1080p HDMI Video Output				
Audio In / Out	Built-in Mic	Built-in Mic	-				
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 128 GB				
Range of Motion	3-Axis	3-Axis	3-Axis				
Protection	IP67, IK10	IP67, IK10	IK10				
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE				
Product QR Code	 2.8 mm Lens, White	 2.8 mm Lens, Black	 4 mm Lens				
	 2.8 mm Lens, White	 2.8 mm Lens, Black	 4 mm Lens				
	Compatible with Cameras Above						
Compatible Accessories	 LTB347H Junction Box (White)	 LTB347HB Junction Box (Black)	 LTB742-120 Wall Mount	 LTB742-120B Wall Mount with Junction Box	 LTB731 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount
	\$20	\$20	\$29	\$49	\$53	\$29	\$29




















Dome Vari-focal Lens IP Camera

SKU	CMIP7243W-SDZ	CMIP7283W-SDZ
	 Junction Box Included	 Junction Box Included
Price	\$269	\$340
Featuring	     	      
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	8 MP, 3840 x 2160 @ 20 fps
Lens	2.8 - 12 mm, VF, Motorized	2.8 - 12 mm, VF, Motorized
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6
Compression	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Supplemental Lighting	Matrix IR LED up to 130 ft	Matrix IR LED up to 130 ft
Smart Focus	Yes	Yes
Special Features	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB
Audio In / Out	1 / 1	1 / 1
Alarm In / Out	1 / 1	1 / 1
MicroSD Storage	Up to 256 GB	Up to 256 GB
Range of Motion	3-Axis	3-Axis
Protection	IP67, IK10	IP67, IK10
Power	12V DC, PoE	12V DC, PoE


Product QR Code		
-----------------	---	---

Compatible Accessories	Compatible with Cameras Above			
	 LTB342-155 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB388 Pole Mount	 LTB389 Corner Mount
	\$34	\$19	\$46	\$46

























Mini Bullet Fixed Lens IP Camera

SKU	CMIP8342W-28MDA CMIP8342W-MDA	CMIP8362W-28MDA	CMIP8382W-28MDA
	 2.8 mm Lens	 4 mm Lens	
Price	\$151	\$175	\$199
Featuring	    	    	     
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	6 MP, 3200 x 1800 @ 20 fps	8 MP, 3840 x 2160 @ 20 fps
Lens	2.8 / 4 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.005 Lux @ F1.6
Compression	H.265+ / H.265	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Supplemental Lighting	Matrix IR LED up to 130 ft	Matrix IR LED up to 130 ft	Matrix IR LED up to 130 ft
Special Features	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB
Audio In / Out	Built-in Mic	Built-in Mic	Built-in Mic
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 256 GB
Protection	IP67	IP67	IP67
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE

Product QR Code				
-----------------	---	---	---	---

Compatible Accessories	Compatible with Cameras Above			
	 LTB345 Junction Box (White)			
	\$20			













Bullet Fixed Lens IP Camera

SKU	CMIP9342W-28MD CMIP9342W-MD	CMIP9362W-28MD	CMIP9382W-28MD CMIP9382W-MD
	 Junction Box Included	 Junction Box Included	 Junction Box Included
Price	\$175	\$199	\$222
Featuring	   	   	    
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	6 MP, 3200 x 1800 @ 20 fps	8 MP, 3840 x 2160 @ 20 fps
Lens	2.8 / 4 mm, Fixed	2.8 mm, Fixed	2.8 / 4 mm, Fixed
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.005 Lux @ F1.6
Compression	H.265+ / H.265	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265
Supplemental Lighting	Matrix IR LED up to 200 ft	Matrix IR LED up to 200 ft	Matrix IR LED up to 200 ft
Special Features	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 256 GB
Protection	IP67	IP67	IP67
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE
Product QR Code	 2.8 mm Lens  4 mm Lens		 2.8 mm Lens  4 mm Lens
Compatible with Cameras Above			
Compatible Accessories	 LTB801 Junction Box	 LTB378 Pole Mount	 LTB379 Corner Mount
	\$20	\$29	\$29


















Bullet Vari-focal Lens IP Camera

SKU	CMIP9743W-SDZ	CMIP9763W-SDZ	CMIP9783W-SDZ	CMIP9243W-SZ		
	 Junction Box Included	 Junction Box Included	 Junction Box Included	 Junction Box Included		
Price	\$281	\$316	\$351	\$587		
Featuring	    	    	     	   		
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	6 MP, 3200 x 1800 @ 20 fps	8 MP, 3840 x 2160 @ 20 fps	4 MP, 2560 x 1440 @ 60 fps		
Lens	2.8 - 12 mm, Motorized	2.8 - 12 mm, Motorized	2.8 - 12 mm, Motorized	4.7 - 118 mm, Motorized		
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.007 Lux @ F1.2		
Compression	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265		
Supplemental Lighting	Matrix IR LED up to 200 ft	Matrix IR LED up to 200 ft	Matrix IR LED up to 200 ft	IR up to 656 ft		
Special Features	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	True WDR 140 dB		
Audio In / Out	1 / 1	1 / 1	1 / 1	1 / 1		
Alarm In / Out	1 / 1	1 / 1	1 / 1	2 / 2		
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 256 GB	Up to 128 GB		
Protection	IP67	IP67	IP67	IP67		
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE		
Product QR Code						
Compatible Accessories	Compatible with CMIP9743W-SDZ / CMIP9763W-SDZ / CMIP9783W-SDZ		Compatible with CMIP9763W		Compatible with CMIP9243W-SZ	
	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB801 Junction Box	 LTB801-A Junction Box	 LTB388 Pole Mount	 LTB389 Corner Mount
	\$29	\$29	\$20	\$20	\$46	\$46














Turret IP Camera











SKU	CMIP1042W-28MA	CMIP1043NW-MZ		
				
Price	\$105	\$211		
Featuring				
Max. Resolution	4 MP, 2560 x 1440 @ 20 fps	4 MP, 2560 x 1440 @ 20 fps		
Lens	2.8 mm, Fixed	2.8 - 12 mm, VF, Motorized		
Min. Illumination	0.01 Lux @ F2.0	0.005 Lux @ F1.6		
Smart Focus	-	Yes		
Compression	H.265+ / H.265	H.265+ / H.265		
Supplemental Lighting	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft		
Special Features	True WDR 120 dB	True WDR 120 dB		
Audio In / Out	Built-in Mic	-		
MicroSD Storage	Up to 256 GB	Up to 256 GB		
Protection	IP67	IP67		
Power	12V DC, PoE	12V DC, PoE		
Product QR Code				
Compatible Accessories	Compatible with Cameras Above			
				
	\$14	\$20	\$34	\$19
				
	\$53	\$53	\$29	\$29

Turret Fixed Lens IP Camera












SKU	CMIP1342WE-28MDA	CMIP1382NW-28MA	CMIP1382WE-28MDA		
					
Price	\$116	\$164	\$175		
Featuring					
Max. Resolution	4 MP, 2560 x 1440 @ 20 fps	8 MP, 3840 x 2160 @ 15 fps	8 MP, 3840 x 2160 @ 15 fps		
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed		
Min. Illumination	0.005 Lux @ F1.6	0.01 Lux @ F2.0	0.01 Lux @ F2.0		
Compression	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265	H.265+ / H.265 / H.264+ / H.264		
Supplemental Lighting	Matrix IR and White Light up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR and White Light up to 100 ft		
Special Features	MD 2.0, True WDR 120 dB	True WDR 120 dB	MD 2.0, True WDR 120 dB		
Audio In / Out	Built-in Mic	Built-in Mic	Built-in Mic		
MicroSD Storage	Up to 512 GB	Up to 256 GB	Up to 512 GB		
Protection	IP67	IP67	IP67		
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE		
Product QR Code					
Compatible Accessories	Compatible with Cameras Above				
					
	\$14	\$20	\$34		
					
	\$19	\$53	\$53	\$29	\$29

Dome IP Camera




















SKU	CMIP7042W-28MA	CMIP7043NW-MZ
		
Price	\$105	\$199
Featuring	    	   
Max. Resolution	4 MP, 2560 x 1440 @ 20 fps	4 MP, 2560 x 1440 @ 20 fps
Lens	2.8 mm, Fixed	2.8 - 12 mm, VF, Motorized
Min. Illumination	0.01 Lux @ F2.0	0.005 Lux @ F1.6
Compression	H.265+ / H.265	H.265+ / H.265
Supplemental Lighting	IR LED up to 100 ft	Matrix IR LED up to 100 ft
Smart Focus	-	Yes
Special Features	True WDR 120 dB	True WDR 120 dB
Audio In / Out	Built-in Mic	-
MicroSD Storage	Up to 256 GB	Up to 256 GB
Range of Motion	2-Axis	3-Axis
Protection	IP67, IK10	IP67, IK10
Power	12V DC, PoE	12V DC, PoE
Product QR Code		

	Compatible with CMIP7042W-28MA			Compatible with CMIP7043NW-MZ		
						
	\$20	\$34	\$49	\$20	\$49	\$53
						
\$53	\$29	\$29	\$29	\$29		













Bullet IP Camera




































SKU	CMIP8042W-28MA	CMIP8043NW-MZ
		
Price	\$105	\$199
Featuring	   	  
Max. Resolution	4 MP, 2560 x 1440 @ 20 fps	4 MP, 2560 x 1440 @ 20 fps
Lens	2.8 mm, Fixed	2.8 - 12 mm, VF, Motorized
Min. Illumination	0.01 Lux @ F2.0	0.005 Lux @ F1.6
Smart Focus	-	Yes
Compression	H.265+ / H.265	H.265+ / H.265
Supplemental Lighting	Matrix IR LED up to 100 ft	Matrix IR LED up to 165 ft
Special Features	True WDR 120 dB	True WDR 120 dB
Audio In / Out	Built-in Mic	-
MicroSD Storage	Up to 256 GB	Up to 256 GB (Snapshot only)
Protection	IP67	IP67
Power	12V DC, PoE	12V DC, PoE
Product QR Code		

	Compatible with CMIP8042W-28MA		Compatible with CMIP8043NW-MZ		
					
	\$20	\$20	\$29	\$29	
					
		\$29	\$29		














Indoor Wi-Fi IP Camera		Palm-size PTZ IP Camera	
SKU	CMIP8942W-28SDA-WIFI	SKU	PTZIP204W-X4IR
			
Price	\$164	Price	\$269
Featuring	     	Featuring	    
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	Max. Resolution	4 MP, 2560 x 1440 @ 30 fps
Lens	2.8 mm, Fixed	Image Sensor	1/3" CMOS
Min. Illumination	0.005 Lux @ F1.6	Compression	H.265+ / H.265 / H.264+ / H.264
Compression	H.265+ / H.265 / H.264+ / H.264	Min. Illumination	0.005 Lux @ F1.6
Supplemental Lighting	Matrix IR LED up to 33 ft	Lens and Zoom	2.8 - 12 mm, 4x Optical Zoom
Special Features	MD 2.0, True WDR 120 dB	Supplemental Lighting	IR LEDs up to 66 ft, Auto Intensity Adjustment
Audio In / Out	Built-in Mic and Speaker	Range of Motion	Pan 0° - 330°, Tilt 0° - 90°
Built-in Wi-Fi	2.4 Ghz, 802.11b/g/n	Special Features	True WDR 120 dB, HLC, EIS
MicroSD Storage	Up to 256 GB	MicroSD Storage	Up to 256 GB, ANR
Range of Motion	3-Axis	Audio In / Out	1 / 1
Power	12V DC, PoE	Protection	IK10, IP66, Lightning / Surge Protection
Product QR Code		Power	12V DC, PoE (802.3 af) Max 12W
		Dimensions	Φ 2.5"
		Product QR Code	
		Accessories	PoE Injector and Wall Mount (LTB202) Sold Separately
		Compatible Accessories	 \$20
			 \$18
			 \$41

Fisheye IP Camera		
SKU	CMIP7106F-SE	CMIP7112F-SE
		
Price	\$646	\$881
Featuring		
Max. Resolution	6 MP, 2560 x 2560 @ 30 fps	12 MP, 3504 x 3504 @ 30 fps
Lens	1.16 mm fisheye, Fixed	1.16 mm fisheye, Fixed
View	360° fisheye, 180° panoramic, more	360° fisheye, 180° panoramic, more
Mode	Multiple Viewing Modes and Virtual PTZ	Multiple Viewing Modes and Virtual PTZ
Compression	H.264 / H.264+ / H.265 / H.265+	H.264 / H.264+ / H.265 / H.265+
Supplemental Lighting	IR up to 50 ft	IR up to 50 ft
Min. Illumination	Color: 0.01 Lux @ F2.25, AGC on B&W: 0.005 Lux @ F2.25, AGC on B&W: 0 Lux with IR	Color: 0.03 Lux @ F2.2, AGC on B&W: 0.006 Lux @ F2.2, AGC on B&W: 0 Lux with IR
MicroSD Storage	Up to 512 GB	Up to 512 GB
Special Features	Heat Mapping, Dewarping, People Counting, Queue Management, 4 Built-in Mics & 1 Speaker	Heat Mapping, Dewarping, People Counting, Queue Management, 4 Built-in Mics & 1 Speaker
Audio / Alarm	1 / 1 2 / 2	1 / 1 2 / 2
Protection	IP67, IK10	IP67, IK10
Power	12V DC, PoE	12V DC, PoE
Product QR Code		
Compatible Accessories	 LTB342-140 Wall Mount \$34	 LTB341 Pendant Mount \$46
	 LTB378 Pole Mount \$29	 LTB701 Junction Box \$20
		 LTB379 Corner Mount \$29











Multi-lens IP Camera						
SKU	CMIP7553W4-SZ8	CMIP7553W5-SZ8				
						
Price	\$1229	\$1411				
Featuring						
Max. Resolution	20 MP Multi-Lens (4 x 5 MP), 2560 x 1920 @ 25 fps	Four: 2560 x 1920 @ 30 fps One: 1440 x 1440 @ 30 fps				
Lens	2.8 - 8 mm, Auto Focus Motorized, 4 Flexible Lenses	4 x 2.8 to 8 mm, 1 x 2 mm				
Compression	Advanced Compression H.265+ / H.265	H.264 / H.264+ / H.265 / H.265+				
Special Features	True WDR 120 dB, IR up to 100 ft, HLC, Defog, EIS	VCA: Human & Vehicle Detection, True WDR 120 dB				
MicroSD Storage	Up to 128 GB, ANR	Up to 1 TB				
Audio In / Out	1 / 1	1 / 1				
Alarm In / Out	2 / 2	2 / 2				
Protection	IP67, IK10	IP67				
Min. Illumination	-	0.005 Lux @ F1.2				
Supplemental Lighting	-	Matrix IR LED up to 100 ft				
Power	12V DC / 24V AC, 22W; PoE+ (802.3at), 19W Class4	12V DC, PoE				
Product QR Code						
Compatible Accessories	Compatible with CMIP7553W4-SZ8 / CMIP7553W5-SZ8					
	 LTB742 Parapet Wall Mount (except 7553W5) \$69	 LTB397 Corner Mount (except 7553W5) \$29	 LTB378 Pole Mount (except 7553W5) \$29	 LTB751 Pendant Mount 20" (50cm) (except 7553W5) \$58	 LTB762 Wall Mount \$29	 LTB751-20 Pendant Mount 7.8" (20cm) \$34



















License Plate IP Camera					PTZ IP Camera									
SKU	CMIP7943WLPR-32R				SKU	PTZIP424W-X25IR		PTZIP4C44W-X25IR						
	 Junction Box Included													
Price	\$705				Price	\$646		\$716						
Featuring	   				Featuring	     		     						
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps				Max. Resolution	4 MP, 2560 x 1440 @ 30 fps		Fixed & PTZ Lens: 4 MP, 2688 x 1520 @ 30 fps						
Lens	8 - 32 mm, Motorized				Image Sensor	1/2.8" CMOS		Fixed: 1/3" CMOS; PTZ: 1/2.8" CMOS						
Min. Illumination	0.0005 Lux @ F1.2, 0 Lux with IR				Lens and Zoom	4.8 - 120 mm, 25x Optical Zoom, Auto Focus		Fixed: 2.8 mm; PTZ: 4.8 - 120 mm, 25x Optical Zoom, Auto Focus						
Supplemental Lighting	Matrix IR up to 330 ft				Min. Illumination	0.005 Lux @ F1.6		Fixed: 0.0005 Lux @ F1.0; PTZ: 0.005 Lux @ F1.6, AGC ON						
Special Features	True WDR 140 dB				Compression	H.265+ / H.265 / H.264+ / H.264		H.265+ / H.265 / H.264+ / H.264						
License Plate Recognition	Capture Rate > 98%, Recognition Rate > 96%, Searchable from IP Camera & NVR				Supplemental Lighting	IR LEDs up to 165 ft, Auto Intensity Adjustment		Fixed: White LED up to 100 ft; PTZ: IR LED up to 328 ft						
MicroSD Storage	Up to 256 GB				MicroSD Storage	Up to 256 GB, ANR		Up to 256 GB, ANR						
Audio In / Out	1 / 1				Range of Motion	Pan 0° - 360°, Tilt -5° - 90°		Pan 0° - 360°, Tilt -15° - 90° (Auto-flip)						
Alarm In / Out	2 / 2				Image Enhancement	True WDR 120 dB, HLC, Defog, EIS		True WDR 120 dB, HLC, Defog, EIS						
Protection	IP67, IK10				Audio In / Out	1 / 1		1 / 1						
Product QR Code					Alarm In / Out	2 / 2		1 / 1						
Compatible Accessories	Compatible with CMIP7943WLPR-32R     				Outdoor Protection	IK10, IP66, Lightning / Surge Protection		IP66, Lightning / Surge Protection						
	LTB801 Junction Box	LTB378 Pole Mount	LTB379 Corner Mount	LTB388 Pole Mount	LTB389 Corner Mount	Power	12V DC, PoE+ (802.3at, class4), Max 18W		12V DC, PoE+ (802.3at, class4), Max 24W					
	\$20	\$29	\$29	\$46	\$46	Dimensions	Φ 4"		Φ 4"					
						Product QR Code			Wall Mount Bracket (LTB212) Included, PoE+ (30W) Sold Separately 					
						Accessories	Wall Mount Bracket (LTB412) Included, PoE+ (30W) Sold Separately		Compatible with Designated Cameras Above					
						Compatible Accessories	 LTB412 Wall Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB751-20 Pendant Mount 7.8" (20cm)	 LTB751 Pendant Mount 20" (50cm)	 LTB742 Parapet Wall Mount for PTZIP4C44W / 514NW / 772NW / 778NW / 4C84W	 LTB378 Pole Mount for All Cameras Above	 LTB397 Corner Mount for PTZIP4C44W / 514NW / 772NW / 778NW
							\$46	\$29	\$29	\$34	\$58	\$69	\$29	\$29

PTZ IP Camera

SKU	PTZIP4C84W-X25IR	PTZIP514NW-X25IR	PTZIP772NW-X32IR	PTZIP778NW-X25IR
	 			
Price	\$822	\$775	\$881	\$1211
Featuring	     	    	    	       
Max. Resolution	Fixed: 8 MP, 3840 x 2160 @ 20 fps PTZ: 4 MP, 2560 x 1440 @ 30 fps	4 MP, 2560 x 1440 @ 30 fps	2.1 MP, 1920 x 1080 @ 30 fps	8 MP, 3840 x 2160 @ 24 fps
Image Sensor	Fixed: 1/2.5" CMOS; PTZ: 1/2.8" CMOS	1/2.8" CMOS	1/2.8" CMOS	1/1.8" CMOS
Lens(es) and Zoom	Fixed: 2.8 mm Panoramic, 180° Horizontal, 80° Vertical PTZ: 4.8 - 120 mm, 25x Optical Zoom, Auto Focus	4.8 - 120 mm, 25x Optical Zoom, Auto Focus	4.8 - 153 mm, 32x Optical Zoom, Auto Focus	5.9 - 147.5 mm, 25x Optical Zoom, Auto Focus
Min. Illumination	Fixed: 0.0005 Lux @ F1.0, PTZ: 0.005 Lux @ F1.6, ACG on	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.005 Lux @ F1.5
Compression	H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Supplemental Lighting	Fixed: White LED up to 100 ft PTZ: IR LED up to 328 ft	IR LEDs up to 492 ft, Auto Intensity Adjustment	IR LEDs up to 656 ft, Auto Intensity Adjustment	IR LEDs up to 656 ft, Auto Intensity Adjustment
MicroSD Storage	Up to 256 GB, ANR	Up to 256 GB, ANR	Up to 256 GB, ANR	Up to 256 GB, ANR
Range of Motion	Pan 0° - 360°, Tilt -15° - 90° (Auto-flip)	-15° - 90° (Auto-flip)	-15° - 90° (Auto-flip)	-15° - 90° (Auto-flip)
Image Enhancement	True WDR 120 dB (PTZ lens), HLC, Defog, EIS	True WDR 120 dB, HLC, Defog, EIS	True WDR 120 dB, HLC, Defog, EIS	True WDR 120 dB, HLC, Defog, EIS
Audio In / Out	1 / 1	1 / 1	1 / 1	1 / 1
Alarm In / Out	1 / 1	2 / 1	2 / 1	2 / 1
Outdoor Protection	IP66, Lightning / Surge Protection	IP66, Lightning / Surge Protection	IP66, Lightning / Surge Protection	IK10, IP66, Lightning / Surge Protection
Power	12V DC, PoE+ (802.3at, class 4), Max 24 W	24V AC, PoE+ (802.3at), Max 24W	24V AC, High PoE Max 40W	24V AC, High PoE Max 40W
Dimensions	Φ 4"	Φ 5"	Φ 7"	Φ 7"

Product QR Code	Wall Mount Bracket (LTB212) Included, PoE+ (30W) Sold Separately 	Wall Mount Bracket (LTB762) Included, PoE+ (30W) Sold Separately 	Wall Mount Bracket (LTB762) Included, High PoE Injector (60W) Sold Separately 	Wall Mount Bracket (LTB762) Included, High PoE Injector (60W) Sold Separately 
------------------------	--	---	---	---

























Compatible with Designated Cameras Above										
 LTB412 Wall Mount for PTZIP424W	 LTB342-JBOX Junction Box for Wall Mount LTB412	 LTB751-20 Pendant Mount 7.8" (20cm) for PTZIP-4C44W / 514NW / 772NW / 4C84W	 LTB751 Pendant Mount 20" (50cm) for PTZIP4C44W / 514NW / 772NW / 4C84W	 LTB742 Parapet Wall Mount for PTZIP4C44W / 514NW / 772NW / 778NW / 4C84W	 LTB762 Wall Mount for PTZIP514NW / 772NW / 778NW / 4C84W	 LTB378 Pole Mount for All Cameras Above (Not for 4C84W)	 LTB379 Corner Mount for PTZIP424W	 LTB397 Corner Mount for PTZIP4C44W / 514NW / 772NW / 778NW	 POE-PTZPI60N High PoE+ (60W) for All Cameras Above	
\$34	\$19	\$34	\$58	\$69	\$29	\$29	\$29	\$29	\$53	

	Advanced Level DVR			Professional Level DVR		
SKU	LTD8304M-ET	LTD8308M-ETC	LTD8316M-ET	LTD8504M-ST	LTD8508M-ST	LTD8516M-STN
						
Price	\$76	\$116	\$198	\$128	\$245	\$446
Featuring						
Analog Video Input	4 Ch (TVI / AHD / CVI / 960H), up to 4 MP	8 Ch (TVI / AHD / CVI / 960H), up to 4 MP	16 Ch (TVI / AHD / CVI / 960H), up to 4 MP	4 Ch (HD-TVI / AHD / CVI / 960H), up to 8 MP	8 Ch (HD-TVI / AHD / CVI / 960H), up to 8 MP	16 Ch (HD-TVI / AHD / CVI / 960H), up to 8 MP
Analog Record Rate	4 MP Lite @ 15 fps, 1080p @ 15 fps	4 MP Lite @ 15 fps, 1080p @ 15 fps	4 MP Lite @ 15 fps, 1080p @ 15 fps	1st up to 8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps	8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps	8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps
IPC Input	1 Ch (up to 5), up to 6 MP	2 Ch (up to 10), up to 6 MP	2 Ch (up to 18), up to 6 MP	2 Ch (up to 6), up to 8 MP	4 Ch (up to 12), up to 8 MP	8 Ch (up to 24), up to 8 MP
	Enhanced IP Mode On: 2 Ch (up to 6 Ch), up to 4 MP, up to 4 Mbps per ch	Enhanced IP Mode On: 4 Ch (up to 12 Ch), up to 4 MP, up to 4 Mbps per ch	Enhanced IP Mode On: 8 Ch (up to 24 Ch), up to 4 MP, up to 4 Mbps per ch	Enhanced IP Mode On: 4 Ch (up to 8 Ch), up to 4 MP, up to 4 Mbps per ch	Enhanced IP Mode On: 8 Ch (up to 16 Ch), up to 4 MP, up to 4 Mbps per ch	Enhanced IP Mode On: 16 Ch (up to 32 Ch), up to 4 MP, up to 4 Mbps per ch
Total Bandwidth	72 Mbps	96 Mbps	128 Mbps	96 Mbps	128 Mbps	128 Mbps
Video Output	VGA / HDMI up to 1920 x 1080, CVBS	VGA / HDMI up to 1920 x 1080, CVBS	VGA / HDMI up to 1920 x 1080, CVBS	HDMI up to 2K (2560 x 1440) / VGA up to 1080p, CVBS	HDMI up to 4K (3840 x 2160) / VGA up to 1080p, CVBS	HDMI up to 4K (3840 x 2160) / VGA up to 1080p, CVBS
Decoding Format	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Deep Learning Support	MD 2.0 or 2 Ch Human / Vehicle Detection VCA	MD 2.0 or 4 Ch Human / Vehicle Detection VCA	MD 2.0 or 4 Ch Human / Vehicle Detection VCA	MD 2.0 or 2 Ch Human / Vehicle Detection VCA	MD 2.0 or 4 Ch Human / Vehicle Detection VCA	MD 2.0 or 4 Ch Human / Vehicle Detection VCA
Playback Channel	4 Ch	8 Ch	16 Ch	4 Ch	8 Ch	16 Ch
Audio Channels (In / Out)	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA
Alarm Channels (In / Out)	-	8 / 4	16 / 4	-	8 / 4	16 / 4
Bandwidth, Connector	10/100 Mbps, 1 x RJ45	10/100 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45
Storage	1 x SATA up to 10 TB	1 x SATA up to 10 TB	2 x SATA up to 10 TB each	2 x SATA up to 10 TB each, NAS, IP SAN	2 x SATA up to 10 TB each, NAS, IP SAN	2 x SATA up to 10 TB each, NAS, IP SAN
PTZ Control	RS485	RS485	RS485	RS485	RS485	RS485
USB	2 x USB 2.0	2 x USB 2.0	1 x USB 2.0, 1 x USB 3.0	2 x USB 2.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0
Dimensions (W x D x H)	12.4" x 9.5" x 1.8"	12.4" x 9.5" x 1.8"	15" x 12.6" x 1.9"	12.4" x 9.5" x 1.8"	15" x 12.6" x 1.9"	15" x 12.6" x 1.9"
Product QR Code						
















Enterprise Level DVR

SKU	LTD8416M-ST	LTD8432M-EA	LTD8432M-ST
			
Price	\$764	\$1058	\$1229
Featuring			
Analog Video Input	16 Ch (TVI / AHD / CVI / 960H) up to 8 MP	32 Ch (HD-TVI / AHD / CVI / 960H) up to 4 MP	32 Ch (HD-TVI / AHD / CVI / 960H) up to 8 MP
Analog Record Rate	8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps	4 MP Lite @ 15 fps / 1080p @ 15 fps	8 MP @ 8 fps / 5 MP @ 12 fps / 3 MP @ 18 fps
IPC Input	18 Ch, up to 12 MP, adjustable up to 34 Ch	16 Ch up to 6 MP, adjustable up to 48 Ch	32 Ch up to 12 MP, adjustable up to 64 Ch
Total Bandwidth	In: 160 Mbps; Out: 160 Mbps	In: 200 Mbps; Out: 160 Mbps	In: 320 Mbps; Out: 256 Mbps
Decoding Format	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Video Output	HDMI1 up to 4K (3840 x 2160) / VGA up to 1080p, HDMI2 up to 1080p, CVBS	HDMI1 / VGA up to 1920 x 1080, HDMI2 up to 4K (3840 x 2160), CVBS (704 x 480)	HDMI1 / VGA up to 1920 x 1080, HDMI2 up to 4K (3840 x 2160), CVBS (704 x 480)
Playback Channel	16 Ch	16 Ch	16 Ch
Audio Channels (In / Out)	4 / 2, RCA	4 / 1, RCA	4 / 1, RCA
Alarm Channels (In / Out)	16 / 4	16 / 4	16 / 4
Bandwidth, Connector	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 2 x RJ45
Storage	4 x SATA up to 12 TB each, NAS, IP SAN	4 x SATA up to 12 TB each, NAS, IP SAN, support eSATA	4 x SATA up to 12 TB each, NAS, IP SAN, support eSATA
USB	2 x USB 2.0, 1 x USB 3.0	2 x USB 2.0, 1 x USB 3.0	2 x USB 2.0, 1 x USB 3.0
PTZ Control	RS-485 (Full-Duplex), Keyboard	RS-485 (Full-Duplex), Keyboard	RS-485 (Full-Duplex), Keyboard
POSS Supported	8 (TCP or RS232)	8 (TCP or RS232)	8 (TCP or RS232)
Dimensions (W x D x H)	17.5" x 15.7" x 2.8"	17.5" x 15.7" x 2.8"	17.5" x 15.7" x 2.8"
Product QR Code			

Professional Level DVR
























SKU	LTD8304D-ET	LTD8308D-ETC	LTD8316D-ET	LTD8504D-ST	LTD8508D-STC	LTD8516D-ST
						
						
Price	\$88	\$128	\$211	\$140	\$258	\$458
Featuring						
Analog Video Input	4 Channels (TVI / AHD / CVI / 960H), up to 4 MP	8 Channels (TVI / AHD / CVI / 960H), up to 4 MP	16 Channels (TVI / AHD / CVI / 960H), up to 4 MP	4 Channels (TVI / AHD / CVI / 960H), up to 8 MP	8 Channels (TVI / AHD / CVI / 960H), up to 8 MP	16 Channels (TVI / AHD / CVI / 960H), up to 8 MP
Analog Record Rate	4 MP Lite @ 15 fps, 1080p @ 15 fps	4 MP Lite @ 15 fps, 1080p @ 15 fps	4 MP Lite @ 15 fps, 1080p @ 15 fps	1st ch. up to 8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps	8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps	8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps
IPC Input	Standard Mode: 1 channel (up to 5)	Standard Mode: 2 channels (up to 10)	8 channels (up to 24) @ up to 4 Mbps each, up to 8 MP	Standard Mode: 2 channels (up to 6)	8 channels (up to 16) @ up to 4 Mbps each, up to 8 MP	16 channels (up to 32) @ up to 4 Mbps each, up to 8 MP
	Enhanced IP Mode: 2 channels (up to 6) @ up to 4 Mbps each. Up to 6 MP	Enhanced IP Mode: 4 channels (up to 12) @ up to 4 Mbps each. Up to 6 MP		Enhanced IP Mode: 4 channels (up to 8) @ up to 4 Mbps each. Up to 8 MP		
Total Bandwidth	72 Mbps	96 Mbps	128 Mbps	96 Mbps	128 Mbps	128 Mbps
Video Output	VGA / HDMI up to 1920 x 1080, CVBS	VGA / HDMI up to 1920 x 1080, CVBS	VGA / HDMI up to 1920 x 1080, CVBS	VGA / HDMI up to 1920 x 1080, CVBS	VGA / HDMI up to 1920 x 1080, CVBS	VGA / HDMI up to 1920 x 1080, CVBS
Decoding Format	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Deep Learning Support	MD 2.0, or 2 ch. of Human / Vehicle Detection VCA, or 1 ch. Facial Recognition	MD 2.0, or 2 ch. Human / Vehicle Detection VCA, or 1 ch. Facial Recognition	MD 2.0, or 8 ch. Human / Vehicle Detection VCA, or 4 ch. Facial Recognition	MD 2.0, or 2 ch. Human / Vehicle Detection VCA, or 1 ch. Facial Recognition	MD 2.0, or 8 ch. Human / Vehicle Detection VCA, or 4 ch. Facial Recognition	MD 2.0, or 8 ch. Human / Vehicle Detection VCA, or 4 ch. Facial Recognition
Playback Channel	4 Ch	8 Ch	16 Ch	4 Ch	8 Ch	16 Ch
Audio Channels (In / Out)	1 / 1, over coax, RCA	4 / 1, over coax, RCA	4 / 1, over coax, RCA	1 / 1, over coax, RCA	1 / 1, over coax, RCA	4 / 1, over coax, RCA
Alarm Channels (In / Out)	-	8 / 4	16 / 4	-	8 / 4	16 / 4
Bandwidth, Connector	10/100 Mbps, 1 x RJ45	10/100 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100 Mbps, 1 x RJ45	10/100 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45
Storage	1 x SATA up to 12 TB	1 x SATA up to 12 TB	2 x SATA up to 12TB each	1 x SATA up to 12TB	1 x SATA up to 12 TB	2 x SATA up to 12 TB each, NAS, IP SAN
PTZ Control	RS485	RS485	RS485	RS485	RS485	RS485
USB	2 x USB 2.0	2 x USB 2.0	1 x USB 2.0, 1 x USB 3.0	2 x USB 2.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0
Dimensions (W x D x H)	12.4 x 9.5 x 1.8"	12.4 x 9.5 x 1.8"	15 x 12.6 x 1.9"	12.4 x 9.5 x 1.8"	12.4 x 9.5 x 1.8"	15 x 12.6 x 1.9"
Product QR Code						

Color 24/7 HD-TVI Camera




























SKU	CMHT1722NW-28CF	CMHT2552-28CF	CMHT1752W-28CF	CMHT1782W-28CF	CMHT3C5PW-28L
					 NEW
Price	\$76	\$81	\$88	\$116	Coming Soon
Featuring					
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2592 x 1944 @ 20 fps	5 MP, 2560 x 1944 @ 20 fps	8 MP, 3840 x 2160 @ 15 fps	3K @20 fps, 3328 x 1504 resolution
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	180° Horizontal, 81° Vertical
Min. Illumination	0.0005 Lux @ F1.0	0.001 Lux @ F1.0	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0	0.0005 Lux @ F 1.0, AGC on; 0 Lux with suppl. light
Supplemental Lighting	Clear White LEDs up to 65 ft	2 Warm Lights up to 130 ft	Clear White LEDs up to 65 ft	Clear White LEDs up to 130 ft	IR and White light up to 131 ft
WDR	True WDR 130 dB	DWDR	True WDR 130 dB	True WDR 130 dB	130 dB WDR
Output	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI	TVI
Protection	IP67	IP67	IP67	IP67	IP67
Power	12V DC	12V DC	12V DC	12V DC	12V DC
Product QR Code					

Compatible with Designated Cameras Above

Compatible Accessories										
	LTB03-W Junction Box for CMHT17XX	LTB307 Junction Box for CMHT17XX	LTB301 Wall Mount for CMHT17XX	LTB342-JBOX Junction Box for Wall Mount LTB301	LTB371 Pendant Mount 21.5" (55cm) for CMHT17XX	LTB378 Pole Mount for CMHT17XX	LTB379 Corner Mount for CMHT17XX	LTB251A Junction Box for CMHT2552	LTB252 Wall Mount for CMHT2552	LTB345 Junction Box for CMHR6422W / 92XX
	\$14	\$20	\$34	\$18	\$53	\$29	\$29	\$20	\$29	\$20

Color 24/7 HD-TVI Camera		Turret Fixed Lens HD-TVI Camera						
SKU	CMHR9222NW-28CFN	CMHR9252W-28CFN	CMHT2122-28LF	CMHT1722-28LS	CMHT1722WE-28F			
								
Price	\$81	\$100	\$29	Coming Soon	\$65			
Featuring								
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps	2 MP, 1920 x 1080 @ 30 fps	2 MP, 1920 x 1080 @ 30 fps	2 MP, 1920 x 1080 @ 30 fps			
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm	2.8 mm, Fixed			
Min. Illumination	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0	0.02 Lux @ F2.2	0.01 Lux @ F1.6	0.005 Lux @ F1.2			
Supplemental Lighting	Clear White LEDs up to 130 ft	Clear White LEDs up to 130 ft	Up to 65 ft	Smart Dual Light up to 130 ft	Matrix IR up to 165 ft			
WDR	True WDR 130 dB	True WDR 120 dB	DWDR	-	True WDR 120 dB			
Output	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI	TVI / AHD / CVI / 960H Switchable			
Protection	IP67	IP67	IP67	IP67	IP67			
Power	12V DC	12V DC	12V DC	12V DC	12V DC			
Product QR Code								
Compatible Accessories	Compatible with Designated Cameras Above							
	 LTB03-W Junction Box for CMHT17XX	 LTB307 Junction Box for CMHT17XX	 LTB301 Wall Mount for CMHT17XX	 LTB342-JBOX Junction Box for Wall Mount LTB301	 LTB371 Pendant Mount 21.5" (55cm) for CMHT17XX	 LTB378 Pole Mount for CMHT17XX / 21XX	 LTB379 Corner Mount for CMHT17XX / 21XX	 LTB345 Junction Box for CMHR92XX / CMHT21XX
	\$14	\$20	\$34	\$19	\$53	\$29	\$29	\$20
























Turret Fixed Lens HD-TVI Camera

SKU	CMHT2152-28LFA		CMHT1752WE-28F		CMHT1782-28F		CMHT1782-28LF			
										
Price	\$76		\$81		\$88		\$88			
Featuring	  		 		 		 			
Max. Resolution	5 MP, 2960 x 1665 @ 20 fps		5 MP, 2560 x 1944 @ 20 fps		8 MP, 3840 x 2160 @ 15 fps		8 MP, 3840 x 2160 @ 15 fps			
Lens	2.8 mm, Fixed		2.8 mm, Fixed		2.8 mm, Fixed		2.8 mm			
Min. Illumination	0.01 Lux @ F1.2		0.003 Lux @ F1.2		0.01 Lux @ F1.2		0.01 Lux @ F1.6			
Supplemental Lighting	IR up to 100 ft, White Light up to 66 ft		Matrix IR up to 200 ft		Matrix IR up to 200 ft		IR up to 130 ft, White Light up to 60 ft			
WDR	DWDR		True WDR 130 dB		DWDR		-			
Output	TVI / AHD / CVI / 960H Switchable		TVI / AHD / CVI / 960H Switchable		TVI / AHD / CVI / 960H Switchable		TVI / AHD / CVI / 960H Switchable			
Protection	IP67		IP67		IP67		IP67			
Power	12V DC		12V DC		12V DC		12V DC			
Product QR Code										
Compatible Accessories	Compatible with Designated Cameras Above					Compatible with All Cameras			Compatible with CMHT1782-28LF	
	 LTB307 Junction Box for CMHT17XX \$20	 LTB03-W Junction Box for CMHT17XX \$14	 LTB345 Junction Box for CMHT21XX \$20	 LTB301 Wall Mount for CMHT17XX \$34	 LTB342-110T Wall Mount for CMHT21XX \$32	 LTB371 Pendant Mount 21.5" (55cm) for CMHT17XX \$53	 LTB378 Pole Mount \$29	 LTB379 Corner Mount \$29	 LTB307 Junction Box for CMHT17XX \$29	 LTB301 Wall Mount for CMHT17XX \$34

















Turret Vari-focal Lens HD-TVI Camera

SKU	CMHT1953-ZF			
				
Price	\$124			
Featuring				
Max. Resolution	5 MP, 2560 x 1944 @ 20 fps			
Lens	2.7 - 13.5 mm, Motorized			
Min. Illumination	0.01 Lux @ F1.2			
Supplemental Lighting	Matrix IR up to 130 ft			
WDR	DWDR			
Output	TVI / AHD / CVI / 960H Switchable			
Protection	IP67			
Power	12V DC			
Product QR Code				
Compatible Accessories	Compatible with CMHT1953-ZF			
	 LTB307 Junction Box (White) \$20	 LTB301 Wall Mount \$34		
	 LTB342-JBOX Junction Box for Wall Mount \$19	 LTB378 Pole Mount \$29	 LTB379 Corner Mount \$29	











Dome Fixed Lens HD-TVI Camera


























SKU	CMHD7322WE-28F	CMHD7352N-28F	CMHD7352WE-28F	CMHD7382-28F	
					
Price	\$65	\$69	\$81	\$88	
Featuring	 		 	  	
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps	5 MP, 2560 x 1944 @ 20 fps	8 MP, 3840 x 2160 @ 15 fps	
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	
Min. Illumination	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2	
Supplemental Lighting	Matrix IR up to 100 ft	Matrix IR up to 65 ft	Matrix IR up to 100 ft	Matrix IR up to 100 ft	
WDR	True WDR 130 dB	DWDR	True WDR 130 dB	DWDR	
Output	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	
Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10	
Range of Motion	3-Axis	3-Axis	3-Axis	3-Axis	
Power	12V DC	12V DC	12V DC	12V DC	
Product QR Code					
Compatible Accessories	Compatible with Cameras Above				
	 LTB347 Junction Box (White) \$14	 LTB349 Angled Ceiling Mount (15°) \$11	 LTB348 Wall Mount (White) \$11		
	 LTB342-110 Wall Mount \$34	 LTB376 Pendant Mount 22" (56cm) \$46	 LTB378 Pole Mount \$29	 LTB379 Corner Mount \$29	

Dome Vari-focal Lens HD-TVI Camera




SKU	CMHD3523DWE-ZF	CMHD3453D-ZFN	
	 Junction Box Included		
Price	\$124	\$112	
Featuring	   	 	
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps	
Lens	2.7 - 13.5 mm, Motorized	2.7 - 13.5 mm, Motorized	
Min. Illumination	0.003 Lux @ F1.2	0.01 Lux @ F1.2	
Supplemental Lighting	Matrix IR up to 200 ft	Matrix IR up to 130 ft	
WDR	True WDR 130 dB	DWDR	
Output	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	
Protection	IP67, IK10	IP67, IK10	
Range of Motion	3-Axis	3-Axis	
Power	12V DC, 24V AC	12V DC, 24V AC	
Product QR Code			
Compatible Accessories	Compatible with Designated Cameras Above		
	 LTB342-140 Wall Mount for CMHD3523DWE	 LTB342-JBOX Junction Box for Wall Mount LTB342-140	 LTB340 In-Ceiling Mount for CMHD3523DWE
	\$34	\$19	\$27
	 LTB453 Junction Box for CMHD3453D-ZFN	 LTB378 Pole Mount for CMHD3453D / 3523DWE	 LTB379 Corner Mount for CMHD3453D / 3523DWE
	\$20	\$29	\$29

Bullet Fixed Lens HD-TVI Camera

SKU	CMHR6222	CMHR6422WE-28F	CMHR6452N-28F
			
Price	\$34	\$58	\$58
Featuring		 	
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps
Lens	3.6 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed
Min. Illumination	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2
Supplemental Lighting	IR up to 65 ft	Matrix IR up to 100 ft	Matrix IR up to 65 ft
WDR	-	True WDR 130 dB	DWDR
Output	HD-TVI	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable
Protection	IP66	IP67	IP67
Power	12V DC	12V DC	12V DC
Product QR Code			
Compatible Accessories	Compatible with Cameras Above		
	 LTB345 Junction Box		
	\$20		


Bullet Fixed Lens HD-TVI Camera				Bullet Vari-focal Lens HD-TVI		
SKU	CMHR9222WE-28FN	CMHR9252N-28FN	CMHR9252WE-28F	CMHR9282-28F	CMHR9623DWE-ZF	CMHR9653D-ZFN
			 Junction Box Included	 Junction Box Included	 Junction Box Included	
Price	\$69	\$69	\$100	\$116	\$159	\$152
Featuring	 		 	 	  	
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps	5 MP, 2560 x 1944 @ 20 fps	8 MP, 3840 x 2160 @ 15 fps	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.7 - 13.5 mm, Motorized	2.7 - 13.5 mm, Motorized
Min. Illumination	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2
Supplemental Lighting	Matrix IR up to 200 ft	Matrix IR up to 130 ft	Matrix IR up to 200 ft	Matrix IR up to 200 ft	Matrix IR up to 263 ft	Matrix IR up to 130 ft
WDR	True WDR 130 dB	DWDR	True WDR 130 dB	DWDR	True WDR 130 dB	DWDR
Output	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable
Protection	IP67	IP67	IP67	IP67	IP67	IP67
Power	12V DC	12V DC	12V DC	12V DC	12V DC, 24V AC	12V DC, 24V AC
Product QR Code						
Compatible Accessory	Compatible with CMHR9222WE / 9252N					
	 LTB345 Junction Box			 LTB801 Junction Box		
	\$20			\$20		

NVR

SKU	VSN8104-P4	VSN8208-P8	VSN7216-P16	VSN8216-P16
			 <i>*Not Compatible with MD 2.0</i>	
Price	\$187	\$328	\$411	\$434
Featuring				
Video Input	4 Ch IP @ 80 Mbps	8 Ch IP @ 320 Mbps	16 Ch IP @ 160 Mbps	16 Ch IP @ 320 Mbps
Video Output	HDMI up to 4K (3840 x 2160) / VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI up to 4K (3840 x 2160) / VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p
Max. Recording Resolution	Up to 8 MP (3840 x 2160)	Up to 12 MP (4247 x 2826)	Up to 8 MP (3840 x 2160)	Up to 12 MP (4247 x 2826)
Decoding Format	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264
Decoding Capability	4 Ch @ 8 MP / 8 Ch @ 4 MP	2 Ch @ 8 MP / 5 Ch @ 4 MP	2 Ch @ 8 MP / 4 Ch @ 4 MP	2 Ch @ 8 MP / 5 Ch @ 4 MP
Max. Playback Resolution	Up to 8 MP (3840 x 2160)	Up to 12 MP (4247 x 2826)	Up to 8 MP (3840 x 2160)	Up to 12 MP (4247 x 2826)
Audio Channels (In / Out)	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA
Alarm Channels (In / Out)	-	8 / 2	4 / 1	8 / 2
Built-in PoE	4 Ch	8 Ch	16 Ch	16 Ch
Bandwidth, Connector	10/100 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45
Storage	1 x SATA up to 8 TB each	2 x SATA up to 10 TB each	2 x SATA up to 10 TB each	2 x SATA up to 10 TB each
Backup	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0
Dimensions (W x D x H)	10.2" x 8.7" x 1.8"	15.0" x 12.4" x 2.1"	14.9" x 12.4" x 2.1"	15.0" x 12.4" x 2.1"
Rack Height	Mini 1U	1U	1U	1U
Product QR Code				
Compatible Accessories	-	Rack Mount (VSRM72) Sold Separately	Rack Mount (VSRM72) Sold Separately	Rack Mount (VSRM72) Sold Separately


NVR

SKU	VSN7432-P16	VSN8432	VSN8432-P16	VSN8864-R
				
	*Not Compatible with MD 2.0			
Price	\$469	\$622	\$740	\$1599
Featuring				
Video Input	32 Ch IP @ 160 Mbps	32 Ch IP @ 320 Mbps	32 Ch IP @ 320 Mbps	64 Ch IP @ 384 Mbps
Video Output	HDMI up to 4K (3840 x 2160) / VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI1 up to 4K (3840 x 2160), HDMI2 up to 4K, VGA up to 1080p
Max. Recording Resolution	Up to 8 MP (3840 x 2160)	Up to 12 MP (4247 x 2826)	Up to 12 MP (4247 x 2826)	Up to 12 MP (4247 x 2826)
Decoding Format	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264
Decoding Capability	2 Ch @ 8 MP / 4 Ch @ 4 MP	2 Ch @ 8 MP / 5 Ch @ 4 MP	2 Ch @ 8 MP / 5 Ch @ 4 MP	4 Ch @ 8 MP / 8 Ch @ 4 MP
Max. Playback Resolution	Up to 8 MP (3840 x 2160)	Up to 12 MP (4247 x 2826)	Up to 12 MP (4247 x 2826)	Up to 12 MP (4247 x 2826)
Audio Channels (In / Out)	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA	1 / 1, RCA
Alarm Channels (In / Out)	16 / 4	16 / 4	16 / 4	16 / 4
Built-in PoE	16 Ch	-	16 Ch	-
Bandwidth, Connector	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 2 x RJ45
Storage	4 x SATA up to 14 TB each	4 x SATA up to 6 TB each; RAID 1, 5	4 x SATA up to 10 TB each; RAID 1, 5	8 x SATA up to 10 TB each; RAID 0, 1, 5, 6, 10
Backup	1 x USB 2.0, 1 x USB 3.0	2 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	2 x USB 2.0, 1 x USB 3.0
Dimensions (W x D x H)	15.7" x 14.2" x 2.9"	17.3" x 13.5" x 1.9"	15.7" x 14.3" x 2.9"	17.4" x 16.8" x 3.5"
Rack Height	1.5U	1.5U	1.5U	2U
Product QR Code				
Compatible Accessories	Rack Mount Included	Rack Mount Included	Rack Mount Included	Rack Mount Included

VMS			
SKU	VSVMS-500	VSVMS-2000	VSVMS-10K
			
Price	\$7057	\$11,764	\$35,293
Featuring			
Video Input	250 Devices, 500 Ch @ 512 Mbps	1,000 Devices, 2,000 Ch @ 512 Mbps	2,000 Devices, 10,000 Ch @ 1,024 Mbps per server; 30,000 Ch with Hierarchical Structure
Video Output	HDMI up to 4K / VGA up to 1080p	No GUI	No GUI
Max. Recording Resolution	Up to 12 MP (4247 x 2826)	Up to 12 MP (4247 x 2826)	Up to 12 MP (4247 x 2826)
Decoding Format	H.265 / H.264	H.265+ / H.265 / H.264	H.265 / H.264
User Management	50 Online Users	300 Online Users	1,000 Online Users
Power Output	12V DC	12V DC	-
Alarm Channels (In / Out)	24 / 8	24 / 8	-
Bandwidth, Connector	10/100/1000 Mbps, 4 x RJ45	10/100/1000 Mbps, 4 x RJ45; 1000 Mbps 2 SFP	10/100/1000 Mbps, 3 x RJ45
Storage	Pro-VS IP SAN	16 x SATA up to 14 TB each; RAID 0 / 1 / 5 / 6 / 10 / 50 / 60	Pro-VS IP SAN
Backup	4 x USB 3.0	4 x USB 3.0	4 x USB 3.0
Dimensions (W x D x H)	17.3" x 13.6" x 1.9"	18.8" x 19" x 5.1"	19" x 21.7" x 3.4"
Product QR Code			
Accessory	Rack Mount Included	Rack Mount Included	-

PRO-VS VMS

16HDD | 500CH, 2,000CH, 10,000CH Video Input Options














































Up to 10,000 channels
in a single server











...









Up to 30,000 channels
in a hierarchical structure

Turret Fixed Lens Camera

SKU	VSIP3442W-28MDA VSIP3442WB-28MDA VSIP3442W-MDA	VSIP3182W-28MDA VSIP3182WB-28MDA VSIP3182W-MDA	VSIP3C52W-28MA	VSIP3C82W-28MDA	
					
Price	\$140	\$187	\$175	\$246	
Featuring					
Max. Resolution	4 MP, 2688 x 1520 @ 25 fps	8 MP, 3840 x 2160 @ 20 fps	5 MP, 2880 x 1620 @ 30 fps	8 MP, 3840 x 2160 @ 30 fps	
Lens	2.8 / 4 mm, Fixed	2.8 / 4 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	
Min. Illumination	0.003 Lux @ F1.6	0.005 Lux @ F1.6	0.001 Lux @ F1.0	0.001 Lux @ F1.0	
Compression	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264 / MJPEG	
Supplemental Lighting	Smart IR LED up to 100 ft	Smart IR LED up to 100 ft	Smart LED up to 100 ft	Smart LED up to 100 ft	
Special Features	MD 2.0, True WDR 120 dB, HLC, Defog	MD 2.0, True WDR 120 dB, HLC, Defog	MD 2.0, True WDR 120 dB, HLC, Defog	MD 2.0, True WDR 120 dB, HLC, Defog	
Audio In / Out	Built-in Mic	Built-in Mic	Built-in Mic	Built-in Mic, 1 / 1	
Alarm In / Out	-	-	-	1 / 1	
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 256 GB, ANR	Up to 256 GB, ANR	
Range of Motion	3-Axis	3-Axis	3-Axis	3-Axis	
Protection	IP67	IP67	IP67, 2KV Surge Protection	IP67, IK10	
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	
Product QR Code	 2.8 mm Lens, White 2.8 mm Lens, Black 4 mm Lens	 2.8 mm Lens, White 2.8 mm Lens, Black 4 mm Lens			
Compatible Accessories	Compatible with Cameras Above			Compatible with VSIP3C82W-28MDA	
	 VSJB742 Junction Box \$20	 VSWM342 Wall Mount \$34	 VSPD342 Pendant Mount \$41	 VSPM342 Pole Mount \$34	 VSJB763 Junction Box \$20

Dome Fixed Lens Camera				Bullet Fixed Lens Camera		
SKU	VSIP7442W-28S	VSIP7442W-28MD VSIP7442W-MD	VSIP7182W-28MDA VSIP7182W-MDA	VSIP8342W-28MDA	VSIP8382W-28MDA	
						
Price	\$128	\$140	\$187	\$140	\$187	
Featuring						
Max. Resolution	4 MP, 2592 x 1520 @ 30 fps	4 MP, 2688 x 1520 @ 25 fps	8 MP, 3840 x 2160 @ 20 fps	4 MP, 2688 x 1520 @ 25 fps	8 MP, 3840 x 2160 @ 20 fps	
Lens	2.8 mm, Fixed	2.8 / 4 mm, Fixed	2.8 / 4 mm, Fixed	2.8 / 4 mm, Fixed	2.8 / 4 mm, Fixed	
Min. Illumination	0.01 Lux @ F2.0	0.003 Lux @ F1.6	0.005 Lux @ F1.6	0.003 Lux @ F1.6	0.005 Lux @ F1.6	
Compression	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	
Supplemental Lighting	Smart IR LED up to 100 ft	Smart LED up to 100 ft	Smart LED up to 100 ft	Smart IR LED up to 165 ft	Smart IR LED up to 165 ft	
Special Features	True WDR 120 dB, HLC, Defog	MD 2.0, True WDR 120 dB, HLC, Defog	MD 2.0, True WDR 120 dB, HLC, Defog	MD 2.0, True WDR 120 dB, HLC, Defog	MD 2.0, True WDR 120 dB, HLC, Defog	
Audio In / Out	1 / 1	-	Built-in Mic	Built-in Mic	Built-in Mic	
MicroSD Storage	Up to 256 GB, ANR	Up to 256 GB	Up to 256 GB	Up to 256 GB	Up to 256 GB	
Range of Motion	3-Axis	3-Axis	3-Axis	3-Axis	3-Axis	
Protection	IP67, IK10, 2KV Surge Protection	IP67, IK10	IP67, IK10	IP67	IP67	
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	
Product QR Code		 2.8 mm Lens  4 mm Lens	 2.8 mm Lens  4 mm Lens	 2.8 mm Lens  4 mm Lens	 2.8 mm Lens  4 mm Lens	
Compatible Accessories	Compatible with Cameras Above				Compatible with Bullet Cameras VSIP8342W / VSIP8382W	
						
	\$20	\$34	\$41	\$34	\$20	\$34

Vari-focal Lens Camera				
SKU	VSIP3643W-MDAZ		VSIP9643W-SZ	
	 <p>Junction Box Included</p>		 <p>Junction Box Included</p>	
Price	\$246		\$246	
Featuring				
Max. Resolution	4 MP, 2688 x 1520 @ 25 fps		4 MP, 2592 x 1520 @ 30 fps	
Lens	2.8 - 12 mm, Auto Focus Motorized Zoom		2.8 - 12 mm, Auto Focus Motorized Zoom	
Min. Illumination	0.003 Lux @ F1.6		0.003 Lux @ F1.6	
Compression	H.265+ / H.265 / H.264 / MJPEG		H.265+ / H.265 / H.264	
Supplemental Lighting	Smart LED up to 130 ft		Smart IR LED up to 165 ft	
Special Features	MD 2.0, True WDR 120 dB, HLC, Defog		True WDR 120 dB, HLC, Digital Defog	
Audio In / Out	Built-in Mic		1 / 1	
Alarm In / Out	-		1 / 1	
MicroSD Storage	Up to 256 GB		Up to 256 GB, ANR	
Range of Motion	3-Axis		3-Axis	
Protection	IP67, IK10		IP67, 6KV Surge Protection	
Power	12V DC, PoE		12V DC, PoE	
Product QR Code				
Compatible Accessories	Compatible with VSIP3643W-MDAZ		Compatible with VSIP9643W	
	 <p>VSWM763 Wall Mount</p> <p>\$34</p>	 <p>VSPM342 Pole Mount for VSIP36</p> <p>\$34</p>	 <p>VSPD342 Pendant Mount for VSIP36</p> <p>\$41</p>	 <p>VSPM963 Pole Mount</p> <p>\$34</p>

Fisheye Camera		
SKU	VSIP7552FW-SE	VSIP75122F-SE
		
Price	\$387	\$740
Featuring		
Max. Resolution	5 MP, 2592 x 1944 @ 30 fps	12 MP, 4000 x 3000 @ 20 fps
Lens	1.4 mm	1.8 mm
Min. Illumination	0.01 Lux @ F2.0	0.03 Lux @ F2.0
Compression	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG
Supplemental Lighting	Smart LED up to 33 ft	Smart LED up to 49 ft
Special Features	True WDR 120 dB, Defog	True WDR 120 dB, Defog, Front End De-warping
Audio In / Out	Built-in Mic, 1 / 1	Built-in Mic, 1 / 1
Alarm In / Out	1 / 1	2 / 1
MicroSD Storage	Up to 256 GB, ANR	Up to 256 GB, ANR
Protection	IP66, IK10	IP66, IK10
Power	12V DC, PoE	12V DC, PoE
Dimensions	Φ 4.9" x 1.7"	Φ 5.9" x 2.2"
Product QR Code		
Accessories	Junction Box VSJB763 Sold Separately	Junction Box VSJB122 Sold Separately
Compatible Accessories	 <p>VSJB763 Fixed Dome Junction Box</p> <p>\$20</p>	 <p>VSJB122 Junction Box</p> <p>\$20</p>

PTZ Camera

SKU	VSPTZIP3122WSL-X4IR	VSPTZIP4C44WSL-X25IR	VSPTZIP424X25WIR	VSPTZIP674X33WIR		
						
Price	\$387	\$692	\$634	\$881		
Featuring						
Max. Resolution	Wide Angle: 2 MP @ 25 fps; PTZ: 2 MP @ 25 fps	4 MP, 2688 x 1520 @ 30 fps	4 MP, 2688 x 1520 @ 30 fps	4 MP, 2688 x 1520 @ 30 fps		
Lens and Zoom	2.8 mm; 2.8 - 12 mm, 4x Optical Zoom, Auto Focus	4.8 - 120 mm, 25x Optical Zoom, Auto Focus	4.8 - 120 mm, 25x Optical Zoom, Auto Focus	4.5 - 148.5 mm, 33x Optical Zoom, Auto Focus		
Min. Illumination	0.002 Lux @ F1.6	0.0005 Lux @ F1.0	0.003 Lux @ F1.5	0.003 Lux @ F1.5		
Compression	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG		
Supplemental Lighting	Wide IR LED up to 33 ft; PTZ IR LED up to 160 ft and Supp. Light up to 33 ft	IR LED up to 330 ft	IR LED up to 330 ft	IR LED up to 500 ft		
Tracking	Linked Tracking	Smart Tracking	Smart Tracking	Smart Tracking		
MicroSD Storage	Up to 256 GB, ANR	Up to 256 GB, ANR	Up to 256 GB, ANR	Up to 256 GB, ANR		
Range of Motion	18°±5°; 0° - 345°, -10° - 100°	Pan 0° - 360°, Tilt -15° - 90°	-15° - 90° (Auto-flip)	-15° - 90° (Auto-flip)		
Image Enhancement	120 dB WDR on Wide Angle; DWDR on PTZ	120 dB WDR	120 dB WDR	120 dB WDR		
Audio In / Out, Alarm In / Out	Built-in Mic & Speaker	Audio 1 / 1, Alarm 2 / 1	Audio 1 / 1, Alarm 2 / 1	Audio 1 / 1, Alarm 1 / 1		
Outdoor Protection	IP66	IP66	IP67, IK10	IP66, Metal Housing		
Power	12V DC 2A, PoE+ (802.3at), Max 16W	12V DC±25%, PoE+ (802.3at), Max 24W	12V DC 3A, PoE+ (802.3at), Max 21W	24V AC±25%, DC 24V±25%, PoE+ (802.3at), Max 25W		
Dimensions	Φ 3.5"	Φ 4"	Φ 4"	Φ 6"		
Product QR Code						
Accessories	Wall Mount / Ceiling Mount Bracket Included, PoE+ (30W) Not Included	Wall Mount Bracket, PoE+ (30W) Not Included	Wall Mount Bracket, PoE+ (30W) Not Included	Wall Mount Bracket, PoE+ (30W) Not Included		
Compatible Accessories	Compatible with VSPTZIP4C44WSL-X25IR, VSPTZIP424X25WIR and VSPTZIP674X33WIR					
	 VSWM424 Wall Mount \$29	 VSWM674 Wall Mount \$34	 VSCM643 Corner Mount \$29	 VSPD643 Pendant Mount \$29	 VSPM643 Pole Mount \$29	 VSPP643 Parapet Mount \$69

IP Intercom Outdoor Station











LTH-303M-WIFI	LTH-302M-PS	LTH-401M-WIFI	LTH-401M-PS	LTK3411MF
 <p>Door Station with WDR 2 MP IPC</p> <ul style="list-style-type: none"> • Compact 4.7" x 2.2" x 0.8" • MIFARE Reader Calling Button • Single Office Application, Call App Directly • PoE or TCP / IP with 12V DC, IP65 	 <p>Protective Shield</p> <ul style="list-style-type: none"> • 5.90" x 3.13" x 1.91" • Polycarbonate • Compatible with LTH-301M-WIFI, LTH302M-WIFI and LTH303M-WIFI • Surface Mount 	 <p>IP Door Station with Contact List</p> <ul style="list-style-type: none"> • 7.16" x 3.33" x 1.01" • Contact List Function • Supports up to 500 Contacts • 4" Touchscreen • Large Physical Call Button • Face, Card, Key fob, and Code Entry • PoE or 12V DC with Wi-Fi • IP65, IK8 Vandal-resistant 	 <p>Protective Shield</p> <ul style="list-style-type: none"> • 7.43" x 3.82" x 1.93" • Electro-Galvanized Steel Sheets • Compatible with LTH-401M-WIFI • Surface Mount 	 <p>4" Touchscreen Door Station</p> <ul style="list-style-type: none"> • 6.79" x 3.27" x 0.89" • Facial, Card, QR Code, and PIN • For Single Office: 1 Click Call App • For Multi-Tenant: Supports up to 500 Apartment Units • Add Indoor Station for App Access • IP65 • TCP / IP, 12V DC • Add LTK-AQE30E for PoE • Secure module LTH-SM1 via RS-485 
\$234	\$22	\$446	\$46	\$364

IP Intercom Indoor Station Management Software Options

LTH-D311GY-WIFI	LTH-D311-DESK	NVMS V3 PC Software + LTS Connect App	X-VMS VMS Windows Software + X-VMS App	LTKE100ME
 <p>IP Video Indoor Station</p> <ul style="list-style-type: none"> • 7" Touch Screen • New Design • NVMS V3 PC • Allows App Access for Door Stations • PoE, 12V DC, Wi-Fi • Up to 17 per Office 	 <p>Desk Stand</p> <ul style="list-style-type: none"> • Designed for LTH-D311GY-WIFI 	 <p>Manage Surveillance, Access Control and Intercom</p> <ul style="list-style-type: none"> • Only 1 PC for Access Control Purposes • LTS Connect App Supports Single Door Controllers and Intercom • Answer and Unlock Doors via App • Up to 256 Video and 50 Door Channels • Time Attendance, E-Map 	 <p>VMS for LTS Surveillance, Access Control and Intercom</p> <ul style="list-style-type: none"> • Supports Multiple Users from Different Computers and Smartphones • Controls Multi-Door and Single Door Controllers and Intercom • Project-based Pricing • Web for Config, Software for Operation 	 <p>LTS MIFARE USB Issuer</p> <ul style="list-style-type: none"> • Supports Both NVMS and X-VMS • Easy Enrolling Cards at Client PC • UL Listed 
\$258	\$34	Free	Project-Based Pricing	\$105

Controllers and Readers |   



Multi-Door Controller Card Readers for LTS Controllers MIFARE Credentials

Multi-Door Controller		Card Readers for LTS Controllers				MIFARE Credentials				
LTK2802 LTK2804		LTK1107M	LTK1107MK	LTK1108M	LTK1108MK	LTKC1356M	LTKF1356M	LTKF1356M-T		
										
<p>LTS 2 Door Controller</p> <ul style="list-style-type: none"> • Secure Metal Closure with Lock • Supports 4 Wiegand 26 / 34 bit Readers • Up to 10,000 Cards and 50,000 Events • Built-in 12V DC 8.5A Power Supply 		<p>LTS 4 Door Controller</p> <ul style="list-style-type: none"> • Secure Metal Closure with Lock • Supports 4 Wiegand 26 / 34 bit Readers • Up to 10,000 Cards and 50,000 Events • Built-in 12V DC 8.5A Power Supply 		<p>LTS Slim Reader</p> <ul style="list-style-type: none"> • Wiegand 26 / 34 • MIFARE Classic • IP65 • -K includes Keypad 		<p>LTS Single Gang Reader</p> <ul style="list-style-type: none"> • Wiegand 26 / 34 • MIFARE Classic • IP65 • -K includes Keypad 		<p>LTS MIFARE Card</p> <ul style="list-style-type: none"> • 13.56 MIFARE Classic • 8- and 10-Digit # Printed 	<p>LTS MIFARE Key Fob</p>	<p>LTS MIFARE Thick Key Fob</p>
\$293		\$58	\$69	\$58	\$69	\$4	\$5	\$5		



Alarm Controls and Securitron Maglocks and Accessories

LTK-600S	LTK-1200S	LTK-600WP	LTK-1200WP	LTK-600D	LTK-1200D	LTK-AM3370	LTK-AM6370
							
<ul style="list-style-type: none"> • Alarm Controls Maglock • 600lb / 1,200lb Holding Force, UL294 and UL10C • Add AM3370 / 6370 if Door Opens Inwards 		<ul style="list-style-type: none"> • Alarm Controls Waterproof Maglock • 600lb / 1,200lb, Swinging or Sliding Gate • Add AM3370 / 6370 as Gate Bracket 		<ul style="list-style-type: none"> • Alarm Controls Double Door Maglock • 600lb / 1,200lb Holding Force, UL294 and UL10C • Add AM3375 / 6375 or 2 x AM3370 / 6370 if Door Opens Inwards 		<ul style="list-style-type: none"> • Alarm Controls LZ Bracket • For Mounting Maglocks onto Inward Swinging Doors • AM3370 for 600 Series and AM6370 for 1200 Series 	
\$147	\$181	\$202	\$275	\$245	\$399	\$84	\$133

Add Two Means of Egress to Your Maglock Installation

LTK-TS-2	LTK-TS-2-2	LTK-TS-2T	LTK-NTS-1	LTK-TS-14	LTK-TS-60	LTK-SREX-100	LTK-XMS	LTK-REB-1	
									
<ul style="list-style-type: none"> • Alarm Controls Green Push Button • 2" sq. Illuminated "Push to Exit," UL294 Listed • TS-2 is SPDT; TS-2-2 is DPDT; TS-2T is SPDT with 2 - 4 sec. Timer 			<ul style="list-style-type: none"> • Alarm Controls No Touch Sensor with 1 - 3 sec. Timer • Single Gang Stainless Steel Wall Plate, SPDT 		<ul style="list-style-type: none"> • Alarm Controls Pushbutton with 2 - 60 sec. Pneumatic Timer, UL294 Listed • 1.5" Large Green / 2.5" Extra Large Red Mushroom Button "Push To Exit", SPDT 		<ul style="list-style-type: none"> • Alarm Controls Focused RTE Motion Sensor • DPDT, UL294 Listed, 3-Year Warranty 		<ul style="list-style-type: none"> • Securitron Adjustable Pattern RTE Motion Sensor • NC only, UL294 Listed, Lifetime Warranty
\$46	\$62	\$121	\$89	\$272	\$209	\$140	\$180	\$126	










Get a Certified Power Supply that Can Integrate with Fire Alarm Systems

LTK-AQD4-4C1R1	LTK-AQD6-8C8R2	LTK-AQL6-B100R8E1	LTK-AQS1216-16F16R2
			
12 or 24V DC 4A with 4 PTC Output		12 and 24V DC 6A with 8 Fuse Output	
12 or 24V DC 6A with 8 PTC Output		12V DC 16A with 16 Fuse Output	
<ul style="list-style-type: none"> • Securitron AQ Series Power Supply with MagnaCare® Lifetime Replacement, No Fault Warranty • Protected Outputs with Alarm Interface, Cuts Off Power of Maglocks from the Source when Fire Alarm Triggered 		<ul style="list-style-type: none"> • UL294, UL603, ULC-S318, ULC-S533 Listed; RoHS Compliant and REACH Compliant 	
\$278	\$359	\$461	\$434

*All HES, Securitron, Adams Rite and Alarm Controls products are available to order through LTS.









































Select Electrical Strikes According to Existing Door Hardware

Electrical Strike for Cylindrical Latch



























LTK-5000C-630	LTK-8000C-630	LTK-AES-300-12	LTK-AES-300-24
			
<ul style="list-style-type: none"> • HES 5000 Strike with 501 and 501A Faceplates • ANSI Metal Jambos or Aluminum Frames • Dual Voltage 12V DC / 24V AC, UL1034, UL294 Listed • Satin stainless steel 	<ul style="list-style-type: none"> • HES 8000 Strike with 801 and 801A Faceplates • Easy Installation with No Cutting on ANSI Frames • Dual Voltage 12V DC / 24V DC, UL1034, UL294 Listed • Satin stainless steel 	<ul style="list-style-type: none"> • AES-300 Strike with All Faceplates Included • Ultra Compact for Minimum Cutting on Wood Frames • 300-12 12V DC/AC; 300-24 24V DC/AC, UL1034 Listed 	
\$147	\$181	\$148	
For Mortise Latch:	Mounting Tabs for Storefront	Change Deadbolt to Mortise Latch on Storefront	
LTK-1500C-630	LTK-152	LTK-4900-25-628	LTK-4900-26-628
			
<ul style="list-style-type: none"> • HES 1500 Strike with 1J, 1K, 1KD and 1KM Faceplates • Stainless Steel Construction with 10-Year No-Fault Warranty • Dual Voltage 12V DC / 24V DC, UL294, UL10C 3 Hours • Satin stainless steel 	<ul style="list-style-type: none"> • HES 152: Universal Mounting Tabs • Mount Inside Hollow Metal and Aluminum Jambos • Compatible with 5000, 8000, 7400, 1500, 1600 and More 	<ul style="list-style-type: none"> • Adams Rite Mortise Latch, Clear Anodized Finish • Drop-in Replacement for Many Deadbolt and Hook Bolt Locks • 31" / 32" Backset, -25 LH or RHR, -26 RH or LHR • Satin stainless steel 	
\$426	\$20	\$81	
For RIM Exit Devices (Push Bar):			
LTK-9400-630	LTK-9600-630	LTK-9500-630	
			
<ul style="list-style-type: none"> • HES 9000 Series Slim-line Strike • Surface Mounted, No Cutting Needed • For 1/2" Pullman Latch • UL294 Listed • Satin stainless steel 	<ul style="list-style-type: none"> • HES 9000 Series Slim-line Strike • Surface Mounted, No Cutting Needed • For 3/4" Pullman Latch • UL294 Listed • Satin stainless steel 	<ul style="list-style-type: none"> • HES 9000 Series Slim-line Strike • Surface Mounted, No Cutting Needed • For 3/4" Pullman Latch • UL294, UL10C 3 Hours Fire Rated • Satin stainless steel 	
\$378	\$378	\$442	

*All HES, Securitron, Adams Rite and Alarm Controls products are available to order through LTS. Please call sales for other HES finish colored models.










*airMAX® setup service available for \$25 per unit























airMAX® Wireless				Antennas and Accessories							
LTU 5GHz											
	UBNT-LTU-LITE 5 GHz PtMP LTU Client, functions in a PtMP environment with the LTU-Rocket as the BaseStation.	\$116		UBNT-NSM5 Indoor/Outdoor airMAX 5GHz CPE.	\$105		UBNT-AMO-5G10 5 GHz, 10 dBi carrier-class 2x2 dual-polarity MIMO omnidirectional antenna.	\$147		UBNT-NS-WM Window mount for NanoStationM airMAX devices.	\$22
	UBNT-LTU-LR 5 GHz PtMP LTU Long-Range Client, functions in a PtMP environment with the LTU-Rocket as the BaseStation.	\$164		UBNT-LAP-120 Ultra-lightweight, 5GHz access point with a versatile, ball-joint mount	\$105		UBNT-AM-5G13 5 GHz, 13 dBi carrier-class 2x2 dual-polarity MIMO omnidirectional antenna.	\$194		UBNT-ACB-ISP Low-cost home WiFi access point made to interoperate with airMAX CPE devices, with remote management by UISP.	\$34
	UBNT-LTU-PRO 5 GHz PtMP LTU Client with advanced RF performance, functions in a PtMP environment with the LTU-Rocket as the BaseStation.	\$211		UBNT-NBE-5AC-GEN2 Compact, UISP-ready, 5GHz WiFi bridge with enhanced surge protection and an optimized radio and antenna.	\$116		UBNT-ETH-SP-G2 ESD protection for outdoor high-speed networks.	\$15		UBNT-ACB-AC High-performance home WiFi access point made to interoperate with airMAX CPE devices, with remote management by UISP.	\$93
	UBNT-LTU-ROCKET 5 GHz PtMP LTU BaseStation Radio, functions in a PtMP environment using the LTU Pro, LTU Lite, or LTU LR as Clients.	\$469		UBNT-PBE-5AC-GEN2 High-performance 5GHz Point-to-Point (PtP) bridge with integrated dish reflector.	\$140		UBNT-UB-AM Universal mounting bracket for wall-mount flexibility.	\$11			
airMAX 5GHz				UBNT-IS-5AC Compact, UISP-ready, 5GHz WiFi bridge with enhanced surge protection and an interchangeable horn antenna.	\$152	UniFi® Wifi					
	UBNT-LOCO5AC Compact, UISP-ready WiFi radio sporting a classic NanoStation design and an updated airMAX AC chipset.	\$58		UBNT-R5AC-LITE airMAX AC Technology for up to 500+ Mbps throughput.	\$159		UBNT-U7-PRO Ceiling-mounted WiFi 7 AP with 6 spatial streams and 6 GHz support for interference-free WiFi in demanding, large-scale environments.	\$222		UBNT-U6-ENTERPRISE Ceiling-mounted WiFi 6E AP with 10 spatial streams and 6 GHz support to provide seamless, multi-band coverage within high client density environments.	\$351.76
	UBNT-LBE-5AC-GEN2 Ultra-lightweight design with proprietary airMAX ac chipset and dedicated management WiFi for easy UISP mobile app support and fast setup.	\$76		UBNT-PBE-5AC-ISO-GEN2 5GHz WiFi bridge with a 450+ Mbps real TCP/IP throughput rate and enhanced surge protection.	\$159		UBNT-U6+ Compact, ceiling-mounted WiFi 6 AP with 4 spatial streams that improves upon the U6 Lite with higher performance and dual-band WiFi 6 support. Ideal for small and medium-sized businesses.	\$152		UBNT-UAP-AC-M Compact, indoor/outdoor WiFi 5 AP with 4 spatial streams and optional external antenna support for directional coverage.	\$116
	UBNT-LOCOM5 Low-cost and efficient broadband 5GHz CPE.	\$79		UBNT-RD-5G30 5 GHz, 30 dBi or 34 dBi high-performance dish antenna.	\$175		UBNT-U6-PRO Ceiling-mounted WiFi 6 AP with 6 spatial streams designed for large offices.	\$199		UBNT-UAP-AC-PRO Ceiling-mounted WiFi 5 AP with 6 spatial streams designed for large offices.	\$175
	UBNT-NBE-M5-16 High-performance 5GHz, 16 dBi bridge.	\$78		UBNT-RP-5AC-GEN2 High-performance 5GHz base-station for PtMP or PtP links. Provides up to 500+ Mbps data throughput.	\$293		UBNT-U6-MESH Sleek, indoor/outdoor WiFi 6 AP with 6 spatial streams designed for mesh applications.	\$222		UBNT-UAP-AC-HD Ceiling-mounted WiFi 5 AP with 8 spatial streams designed to support high-density networks and critical system applications.	\$411
							UBNT-U6-LR Ceiling-mounted WiFi 6 AP with 8 spatial streams and extended signal range.	\$222		UBNT-UAP-AC-SHD Ceiling-mounted WiFi 5 AP with 8 spatial streams designed to support high client density environments.	\$646
						UniFi® Cloud Gateways		UniFi® CloudKeys Gateways			
							UBNT-JDM-PRO 10 Gbps Cloud Gateway with 100+ UniFi device / 1,000+ client support, 3.5 Gbps IPS routing.	\$446		UBNT-UXG-LITE A compact and powerful UniFi gateway with a full suite of advanced routing and security features.	\$152
							UBNT-JDM-SE 10 Gbps Cloud Gateway with 100+ UniFi device / 1,000+ client support, 3.5 Gbps IPS routing, and built-in PoE switching.	\$587		UBNT-UXG-PRO Multi-WAN independent gateway designed to protect large-scale networks with a full suite of advanced routing and security features.	\$587
							UBNT-JX Impressively compact UniFi Cloud Gateway and WiFi 6 access point that runs UniFi Network. Powers an entire network or simply meshes as an access point.	\$175		UBNT-UCK-G2-PLUS Compact UniFi Console with full UniFi application support and a pre-installed 1TB HDD for NVR storage.	\$234

*All Ubiquiti products are available to order through LTS










UniFi® PoE Switching			EdgeMAX® Routing			Unmanaged PoE Switches		
	<ul style="list-style-type: none"> • UBNT-USW-ENTERPRISE-48-POE (720W) • UBNT-USW-ENTERPRISE-24-POE (400W) • UBNT-USW-ENTERPRISE-8-POE (120W) A 48 / 24 / 8-port, Layer 3 switch with 2.5 GbE PoE+ output.	\$1881 \$940 \$564		Gigabit router with advanced network management and security features.	\$69		<ul style="list-style-type: none"> • 60W, 802.3af/at • 4 Gigabit PoE Ports • 1 Gigabit RJ45 Port 	\$64
	<ul style="list-style-type: none"> • UBNT-USW-PRO-MAX-48-POE (720W) • UBNT-USW-PRO-MAX-24-POE (400W) • UBNT-USW-PRO-MAX-16-POE (180W) A 48 / 24 / 16-port, Layer 3 Etherlighting™ switch with 2.5 GbE and PoE++ output.	\$1528 \$940 \$469		Compact but powerful router sporting (5) Gigabit RJ45 ports with passive PoE support and an SFP port.	\$116		<ul style="list-style-type: none"> • 110W, 802.3af/at • 8 Gigabit PoE Ports • 1 Gigabit RJ45 Port • 1 Gigabit Fiber Optical Port 	\$116
	<ul style="list-style-type: none"> • UBNT-USW-PRO-48-POE (600W) • UBNT-USW-PRO-24-POE (400W) • UBNT-USW-PRO-8-POE (120W) A 48 / 24 / 8-port, Layer 3 switch capable of high-power PoE++ output.	\$1293 \$822 \$411		Rack-mount bracket to mount EdgeMAX products in standard 19" racks.	\$18		<ul style="list-style-type: none"> • 225W, 802.3af/at/bt • 16 Gigabit PoE Ports • 2 Gigabit RJ45 Ports • 2 Gigabit Fiber Optical Ports 	\$269
	<ul style="list-style-type: none"> • UBNT-USW-48-POE (195W) • UBNT-USW-24-POE (95W) • UBNT-USW-16-POE (42W) A 48 / 24 / 16-port, Layer 2 PoE switch with a silent, fanless cooling system.	\$693 \$446 \$352		Compact but powerful switch with (5) Gigabit PoE ports and an intuitive EdgeSwitch XP interface.	\$112		<ul style="list-style-type: none"> • 370W, 802.3af/at/bt • 24 Gigabit PoE Ports • 2 Gigabit RJ45 Ports • 2 Gigabit Fiber Optical Ports 	\$352
	<ul style="list-style-type: none"> • UBNT-USW-LITE-16-POE (45W) • UBNT-USW-LITE-8-POE (52W) A wall-mountable, 16 / 8-port, Layer 2 PoE switch with a fanless cooling system.	\$234 \$128		Gigabit switch with (8) RJ45 ports, (2) SFP ports, and a 150W power supply.	\$234		<ul style="list-style-type: none"> • 60W, 802.3af/at • 10/100 Mbps, up to 820 ft • Network Topology Management, Alarm Push, Network Health Monitor 	\$53
	UBNT-USW-FLEX (46W) Flexible 5-port, Layer 2 PoE switch for indoor and outdoor use, that can be powered with PoE++.	\$124		Layer 2/3, PoE switch with (24) Gigabit RJ45 ports, (2) SFP ports, and a 250W power supply.	\$469		<ul style="list-style-type: none"> • 60 W, IEEE 802.3af/at • 4 x Gigabit PoE RJ45 ports • Up to 1,000 ft • 1 x Gigabit RJ45 port • Unified cloud management 	Coming Soon
	UBNT-USW-FLEX-MINI A compact, 5-port, Layer 2 switch that can be powered with PoE or a 5V USB-C adapter.	\$41		Layer 2/3, PoE switch with (24) Gigabit RJ45 ports, (2) SFP ports, and a 250W power supply.	\$469		<ul style="list-style-type: none"> • 110 W, IEEE 802.3af/at • 8 x Gigabit PoE RJ45 ports • Up to 1,000 ft • 1 x Gigabit RJ45 port • Unified cloud management 	Coming Soon
	UBNT-USW-FLEX-UTILITY The Switch Flex Utility is an outdoor weatherproof enclosure designed for use with the Switch Flex.	\$58					<ul style="list-style-type: none"> • 230 W, IEEE 802.3af/at • 16 x Gigabit PoE RJ45 ports • Up to 1,000 ft • 1 x Gigabit RJ45 port • 1 x Gigabit fiber optical port • Unified cloud management 	Coming Soon
							<ul style="list-style-type: none"> • 370 W, IEEE 802.3af/at • 24 x Gigabit PoE RJ45 ports • Up to 1,000 ft • 1 x Gigabit RJ45 port • 1 x Gigabit fiber optical port • Unified cloud management 	Coming Soon

*All Ubiquiti products are available to order through LTS






Power Adapters			Power Supplies				Warning Signs			
PS120V0800	800mA, 12V DC	\$4	12V DC		Rating			LTSIGNB	• 9"(W) x 11"(H)	\$4
PS120V1000	1000mA, 12V DC	\$5	PS120V5-D	• 4 Ports • 5 Amps	PTC	\$34		LTSIGNA	• 11"(W) x 18"(H)	\$5
PS120V2000	2000mA, 12V DC	\$8	DV-AT1207M-D09	• 9 Ports • 7 Amps	PTC	\$53				
PS120V3000	3000mA, 12V DC	\$11	DV-AT1209A-D9P	• 9 Ports • 9 Amps	PTC	\$53		LTSACS-801	• Solar Power (No Battery Needed) • Actively Flashing LCD	\$8
TS5-6W	5000mA, 12V DC	\$18	DV-AT1212A-D18P	• 18 Ports • 12 Amps	PTC	\$81	Monitor Brackets			
PS240V1000	1000mA, 24V AC	\$11	DV-AT1220A-D18P	• 18 Ports • 20 Amps	PTC	\$105		LTMB1026	• For 10" - 26" Screen Size • Distance to Wall 35 - 390 mm • Max load: 10 kg	\$12
PS240V3000	3000mA, 24V AC	\$20	DV-RT1224A-D24	• 24 Ports • 24 Amps	PTC	\$140		LTMB1737	• For 17" - 37" Screen Size • Distance to Wall 35 - 380 mm • Max load: 30kg	\$22
DV-AT12015-D01	1500mA (Max), 24V AC to 12V DC	\$11	DV-RT1232A-D32	• 32 Ports • 32 Amps	PTC	\$187		LTMB2655	• For 26" - 55" Screen Size • Distance to Wall 7 mm • Max load: 50kg	\$29
Passive Video Balun Tranceivers			DV-AT1205A-D07	• 4 Ports • 5 Amps	PTC	\$46		LTMB3270	• For 32" - 70" Screen Size • Distance to Wall 70 - 390 mm • Max load: 75kg	\$46
	<ul style="list-style-type: none"> • 8 MP/4K Passive HD Video Balun • Compatible with HD-TVI / CVI / AHD / CVBS Cameras • Support 720p / 960p / 1080p / 3 MP / 5 MP / 8 MP 	\$12/Pair	DV-AT1209A-D9	• 9 Ports • 9 Amps	Fuse	\$58				
LTAB4020NT			DV-AT1212A-D18	• 18 Ports • 12 Amps	Fuse	\$81				
		\$14/Pair	DV-AT1210A-D07	• 9 Ports • 10 Amps	Fuse	\$76				
LTAB4030TP			DV-AT1210A-D10	• 18 Ports • 10 Amps	Fuse	\$88				
DVR Lockboxes			DV-AT1215A-D10	• 18 Ports • 18 Amps	Fuse	\$105				
	LT-DVRLB18-18-5	\$152	DV-AT1232A-D18	• 18 Ports • 32 Amps	Fuse	\$116				
	LT-DVRLB21-21-8	\$175	DV-AT1232A-D27	• 27 Port • 32 Amp	Fuse					
	LT-DVRLB21-24-8	\$187	24V AC		Rating					
	LTBHWB (Wall Mount Bracket)	\$53	DV-AC2408A-D07	• 9 Port • 8 Amp	PTC	\$81				
			DV-AC2412A-D10	• 18 Ports • 12 Amps	PTC	\$93				

Connectors			Control Cables			
	LTA1001	BNC Twist-On RG59 Male (20 pcs/pack)	\$14/Pair		<ul style="list-style-type: none"> • 18AWG / 2 Conductor Access Control Wire • 1000 ft Stranded • 99.99% OFC • Access Control, Intercom, and Alarm • CMR Rated, UL Listed • Color: Gray 	\$158
	LTA1002	BNC Male to RCA Female (20 pcs/pack)			<ul style="list-style-type: none"> • 18AWG / 6 Conductor Control Wire • 500 ft Stranded • 99.99% OFC • CMR Rated • Shielded ETL • Color: Gray 	\$192
	LTA1003	BNC Female to RCA Male (20 pcs/pack)			<ul style="list-style-type: none"> • 500 ft Stranded Control Cable • 99.99% OFC • 18/4 + 22/2 + 22/4 + 22/6 Combination Cable • Shielded 22/6 • ETL Rated, CMR Rated • Color: Yellow 	\$394
	LTA1004	BNC Male to RCA Male (20 pcs/pack)		Cables (HDMI, DC Power, X RJ45)		
	LTA1005	BNC Coupler Female to Female (20 pcs/pack)			<ul style="list-style-type: none"> • HDMI with Ethernet • 4.5 / 25 / 50 ft Cable • Hi-Speed 1080p / 3D, 100% Triple Shield 24K • Gold Plated with Nylon Jacket 	\$6 / \$18 / \$29
	LTA1006	BNC Compression for RG59 (20 pcs/pack)	\$18/Pack		<ul style="list-style-type: none"> • 100 ft HDMI Cable • Hi-Speed 1080p with USB Booster 26AWG 	\$73
	LTA1007	BNC Male Crimp-on (20 pcs/pack)	\$14/Pack		<ul style="list-style-type: none"> • Terminal Connector • 9 Terminal, DC & AC • Connector / Splitter 	\$8
	LTA1013	BNC Male to 2 BNC Female (20 pcs/pack)			<ul style="list-style-type: none"> • DC Power Connector • LTA2017 - Male • LTA2013 - Female (20 pcs/pack) 	\$10/pack
	LTA1014	X RJ45 8P8C Cat5e Crimp Connector	\$0.60		<ul style="list-style-type: none"> • DC Power Adapter Cable • LTA2004 - Male • LTA2014 - Female (20 pcs/pack) 	\$14
	LTA1016	X RJ45 8P8C Cat6 Crimp Connector	\$0.60		<ul style="list-style-type: none"> • Male / Female Pigtail • LTA2010 - Male • LTA2008 - Female 	\$1
	LT-KY5E110	Enhanced Cat5e Keystone Jack	\$1	CAT5e Pre-Made Cables		
	LTAC2042 LTAC2041	<ul style="list-style-type: none"> • Pre-made RJ45 CAT5e Cable • LTAC2042 - 50 ft • LTAC2041 - 100 ft 	\$8 \$15	Tools		
	LTA-T203MS	<ul style="list-style-type: none"> • Wire Stripper • Strip Wire (12 - 22 gauge) with One Pull of Trigger • Built-in Ruler Splicer with Auto Adjust 	\$12			

Cables (Coaxial, CAT5e and CAT6 Network)

	LTAC5100W-CMR LTAC5100BL-CMR LTAC5100B-CMR		<ul style="list-style-type: none"> • 1,000 ft CAT5e 99.99% OFC • UL Listed, RoHS Compliant • ISO / IEC11801, ANSI / TIA-568B-C.2 • Fluke Tested • CMR Rated • Color: White / Blue / Black 	\$122
	LTAC6250W-CMR LTAC6250BL-CMR LTAC6250B-CMR		<ul style="list-style-type: none"> • 1,000 ft CAT6 99.99% OFC • UL Listed, RoHS Compliant • ISO / IEC11801, ANSI / TIA-568B-C.2 • Fluke Tested • CMR Rated • Color: White / Blue / Black / Gray / Orange 	\$155
	LTAC5100B-CMX LTAC6250B-CMX	 	<ul style="list-style-type: none"> • 1,000 ft CAT5e / CAT6 99.99% OFC • ETL Listed, RoHS Compliant • ISO / IEC11801, ANSI / TIA-568B-C.2 • Fluke Tested • Outdoor Rated, UV Resistance • Direct Burial • Color: Black 	\$146 \$194
	LTAC6250W-CMP LTAC6250BL-CMP LTAC6250B-CMP		<ul style="list-style-type: none"> • 1,000 ft CAT6 99.99% OFC • UL Listed, RoHS Compliant • ISO / IEC11801, TIA-568-C.2 • Fluke Tested • Plenum Rated, CMP • Color: White / Blue / Black 	\$315
	LTAC2040 LTAC2046		<ul style="list-style-type: none"> • 1,000 ft CCA CAT5e / CAT6 • Commercial Grade Network Cable • Color: White / Blue / Black 	\$56 \$72
	LTAC2031W / LTAC2031B LTAC2033W / LTAC2033B		<ul style="list-style-type: none"> • Siamese Coaxial Cable • White / Black Bare Wire • 500 ft / 1,000 ft RG59, Coaxial 95%, Braided + 18/2 • 18AWG CCA Cable 	\$75 \$146
	LTAC2030 LTAC2032		<ul style="list-style-type: none"> • Siamese Coaxial Cable • White / Black Bare Wire • 500 ft / 1,000 ft RG59, Coaxial 95%, Braided + 18/2 • Solid 100% 18AWG Oxygen Free Copper 	\$91 \$175
	LTAC2030B-CMX LTAC2032B-CMX		<ul style="list-style-type: none"> • Siamese Coaxial Cable • Color: Black • Direct Burial • 500 ft / 1,000 ft RG59, Coaxial 95%, Braided + 18/2 • Solid 100% 18AWG Oxygen Free Copper 	\$100 \$194
	LTAC2060W / LTAC2060B LTAC2100W / LTAC2100B LTAC2125W / LTAC2125B		<ul style="list-style-type: none"> • Pre-made HD Siamese Cable with BNC and Power Connector • 60 ft / 100 ft / 125 ft • Color: White / Black 	\$9 \$12 \$14

























Cables (DC Power, VGA, Microphone)

	LTA2005	<ul style="list-style-type: none"> • DC Power Splitter • 1 Female to 2 Male 	\$2
	LTA2006	<ul style="list-style-type: none"> • DC Power Splitter • 1 Male to 2 Female 	\$2
	LTA2011	<ul style="list-style-type: none"> • DC Power Splitter • 1 Female to 4 Male 	\$2
	LTA2018	<ul style="list-style-type: none"> • DC Power Splitter • 1 Female to 8 Male 	\$5
	LTA2001	<ul style="list-style-type: none"> • 12" Microphone with Power Cable • Microphone with Amplifier 	\$7

Converters, Splitters, Extenders



	LTAH2100E	<ul style="list-style-type: none"> • USB RJ45 Extender • 2 x USB, USB A Female • Plug & Play • Cable Type: CAT5, 5E, 6, UTP • Extend Distance to 150 ft 	\$24
	LTAH014LN	<ul style="list-style-type: none"> • 1 in / 4 out HDMI Splitter • Support HDMI 1.3 and 1080p • HDCP & 3D Support 	\$69
	LTAH018L	<ul style="list-style-type: none"> • 1 in / 8 out HDMI Splitter • 8 Identical HDMI Outputs • Up to 225MHz • Support 3D 	\$116
	LTAH3100E	<ul style="list-style-type: none"> • VGA / Audio X RJ45 Extender • Video Type: VGA • Supports 1920 x 1440 • 1 x Stereo Audio (R/L) • Extend Distance to 900 ft 	\$101
	LTAH1070E	<ul style="list-style-type: none"> • HDMI Extender 1080p • Supports 1080p up to 165 ft • 5V DC/1A, Power Adapter included 	\$76
	LTAH5300T	<ul style="list-style-type: none"> • HD-TVI Distributor • Input: 1 x HD-TVI • Output: 3 x HD-TVI 	\$45

IDEAL Tools and Connectors | **Power Strips and Extension Cords**

	IDEAL-85-372E IDEAL-85-377E	CAT5e / CAT6 Feed-Thru Modular Plugs	\$1 \$1		LTPE1610 LTPE1625 LTPE1650 LTPE16100		• 10/25/50/100 ft, 16/3C SJWTW Extension Cord • Orange Single Outlet, UL Listed	\$11 \$14 \$21 \$34
	IDEAL-30-495	FT-45™ Feed-Thru Modular Plug Crimp Tool Crimps Feed-Thru, Standard and Shielded	\$65		LTPE1225-L3 LTPE1250-L3 LTPE12100-L3		• 25/50/100 ft, 12/3C SJWTW Extension Cord • Yellow 6 ft Cord, Triple Outlet • Lighted when Power is On, UL Listed	\$34 \$39 \$69
	IDEAL-35-088	Snips with Stripping Notch	\$22		LTPE1420-3		• 20 ft 14/3C Indoor Extension Cord • Orange Cord, Triple Outlet with Sliding Cover Feature, UL Listed	\$18
	IDEAL-45-074	Data T®-Cutter	\$26		LTPS0806 LTPS0812		• 8 Outlet Power Strips • White, 2 / 6 / 12 ft Cord, UL Listed	\$14 \$18
	IDEAL-89-1047E	InSITE™ RG-59 BNC Compression Connectors Window Ensures Proper Cable Insertion	\$3		LTPS0606-M		• 6 Outlet Metal Case Outlet Strips • Yellow, 6 ft Cord, ETL Listed	\$18
	IDEAL-30-793	OmniSeal™ PRO XL Compression Tool	\$88		LTPS0806-M		• 8 Outlet Metal Case Outlet Strips • Yellow, 6 ft Cord, UL Listed	\$24
	IDEAL-33-632	LinearX@3 Compression Tool	\$41		LTPS0806-A		• 8 Way Aluminum Alloy Case Power Bar • 6 ft Cord, ETL Listed	\$29
	IDEAL-45-605	PrepPRO® Coax/UTP Cable Stripper	\$22		LTPS1215-A		• 12 Way Aluminum Alloy Case Power Bar • 15 ft Cord, ETL Listed	\$41

WD Purple HDDs and microSD Cards



 <p>WD Purple™ 3.5" Surveillance HDD</p> <p>8TB</p>	Capacity	1TB, 2TB, 3TB, 4TB, 6TB, 8TB	<p>WD Purple™ SC QD101 Ultra Endurance microSD Card</p>  <p>Western Digital WD Purple QD101</p> <p>512GB</p>	Capacity	32GB, 64GB, 128GB, 256GB, 512GB, 1TB
	Interface	SATA 6 Gb/s		Interface	SDA 6.0
Form Factor	3.5 inch		Form Factor	microSDHC (32 GB only) / microSDXD	
MTBF	Up to 1 million hours		Warranty	3 years	
Warranty	3 years	<ul style="list-style-type: none"> • Engineered for mainstream surveillance security systems • AllFrame™ technology improves ATA streaming to help reduce frame loss and improve overall video playback • Supports up to 64 single-stream cameras per drive • Supports Western Digital Device Analytics™ (WDDA) • Workload rating up to 180TB year, 3x the rating of desktop drive 	<ul style="list-style-type: none"> • Optimized for video surveillance cameras that operate 24/7 • Designed with ultra endurance for continuous operation • Weather-resistant, humidity resistant, and withstands temperatures from -13°F to 185°F (-25°C to 85°C) • Failover local storage, continuous recording, even in case of a temporary camera disconnection • Supports card health monitor functionality • Advanced 96-layer 3D NAND Technology 		